



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

DESCRIPTION



5CCT Selectable LED Retrofit

These LED Retrofit Kits are compatible with most recessed cans. 5CCT selectable LED retrofit is designed with a white baffle construction, and comes with a dimmable LED driver. Suitable for IC and Non-IC housings.



CONSTRUCTION

Housing
Aluminum

Finish
White powder coat housing and trim

Operating Temperature
-22°F - 104°F

Lens Material
Polycarbonate Lens

Mounting Type
Recessed Housing


Dimming
TRIAC 120V, 10-100%

Listings
ETL listed to US and Canadian safety standards. Wet location listed.


Warranty
5-year limited warranty.
NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C. Specifications subject to change without notice.

LINE DRAWING

TRR4RF-5CCTA
Comes with 3 tension fin clips
Compatible with most 4" recessed cans.

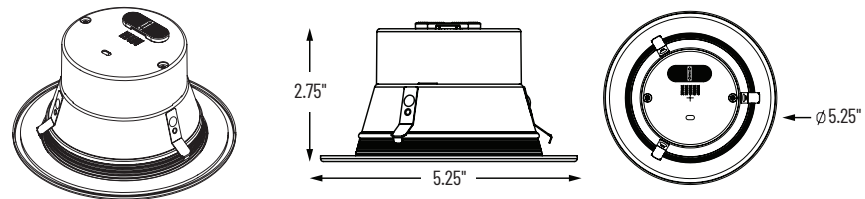

TRR56RF-5CCTA
Comes with 2 torsion clips.
Compatible with most 5" and 6" recessed cans.

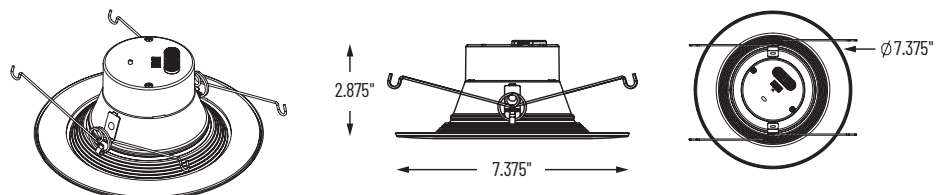

APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

ORDERING INFORMATION

SERIES	SIZE	TYPE	COLOR TEMP.
TRR	[4] : 4" [56] : 5/6"	[RF] : Retrofit	[-5CCTA] : 2700K,3000K,3500K,4000K,5000K

LIGHTING & ELECTRICAL SPECIFICATIONS ELECTRICAL SPECIFICATIONS

SERIES	INPUT POWER (WATTS)	LPW	LUMENS @ 2700K	CRI	L70 (HOURS)
TRR4RF-5CCTA	13W	77	1,000	90	50,000
TRR56RF-5CCTA	18W	83	1,500	90	50,000

Input Voltage	120-277v
Frequency Range (Hz)	50-60 Hz
Efficiency @ Full Load	>87
Power Factor @ Full Load	>0.9



APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION





CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

PHOTOMETRICS

TRR4RF-5CCTA

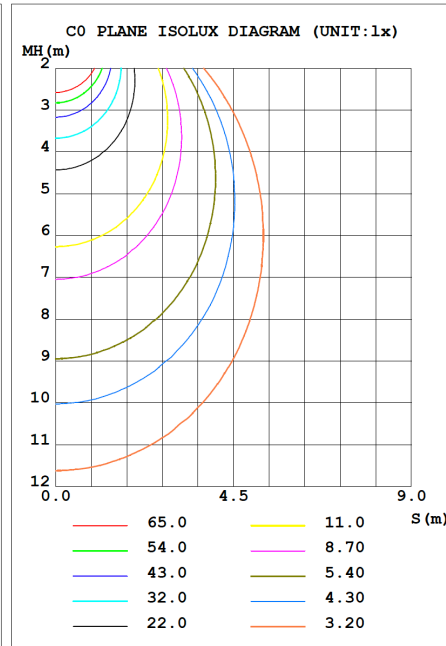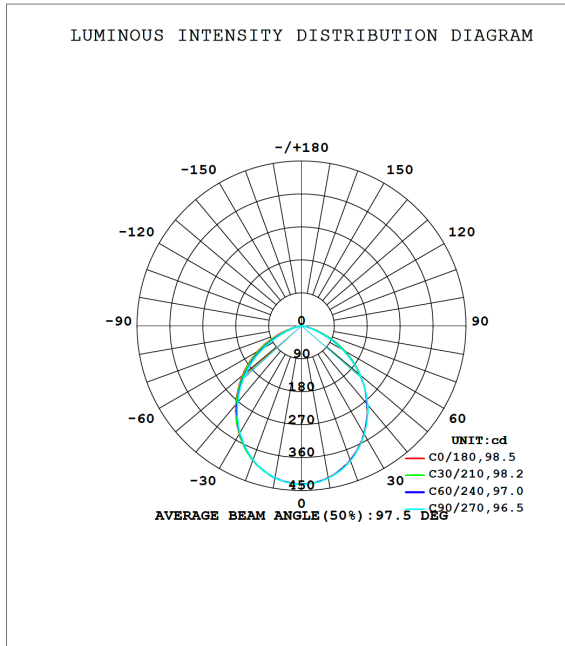

TRR56RF-5CCTA

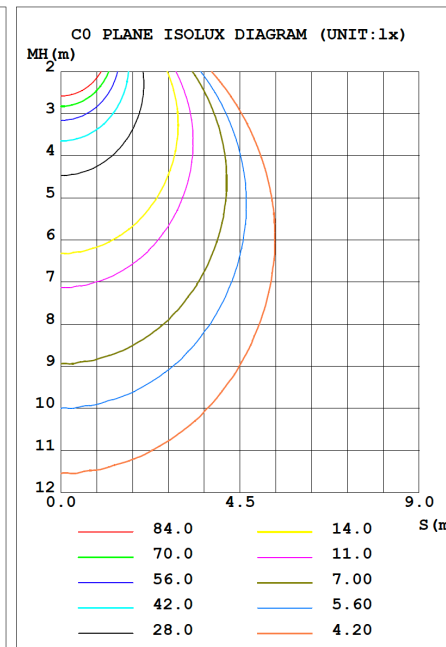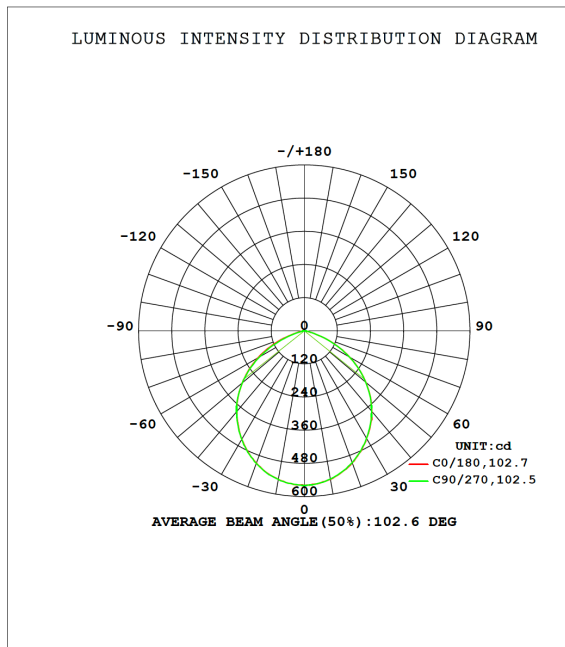

APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION