

INSTALLATION INSTRUCTIONS

CANOPY LIGHT FIXTURE

WARNING:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH ALL APPLICABLE INSTALLATION CODES BY A LICENSED ELECTRICIAN.

To avoid the risk of fire, explosion, or electric shock, this product should be installed, inspected, and maintained by a qualified electrician only, in accordance with all applicable electrical codes.

TO AVOID ELECTRIC SHOCK:


- Be certain electrical power is OFF before and during installation and maintenance.
- Luminaire must be connected to a wiring system with an equipment-grounding conductor.

WARNING:


- Make sure the supply voltage is the same as the rated luminaire voltage.
- This fixture is not designed for use with temporary power sources such as generators.
- Do not install where the marked operating temperatures exceed the ignition temperature of the hazardous atmosphere.
- Do not operate in ambient temperatures above those indicated on the luminaire nameplate.
- Keep lens tightly closed when in operation.
- Supply wire must be rated for 90°C minimum.

SURFACE MOUNT INSTALLATION


1. Loosen the screw on the side of the housing and pull out the connecting plate.

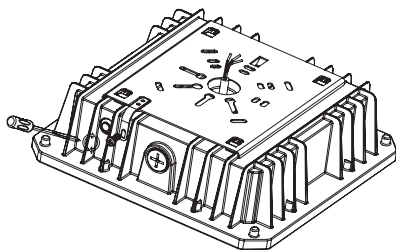


2. Attach connecting plate onto ceiling surface or junction box and put the supply wires through center hole (1.1"/27.9mm).

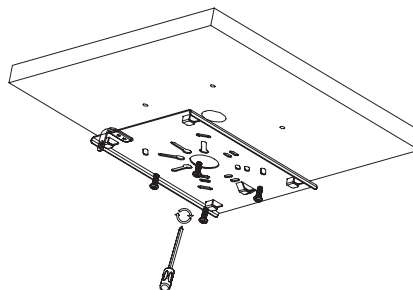


3. If you need to use the surface-mounted installation, a circle of silicone sealant is needed around the edge of the fixed plate.

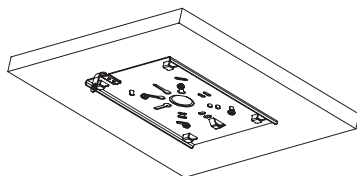

4. Mount fixture onto connecting plate tabs and connect the wires as shown below. If dimming leads (DIM+/DIM-) are not needed cap off and secure properly.

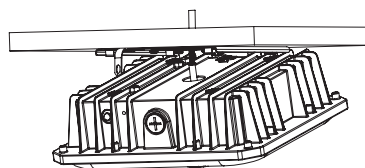

5. Slide fixture back into the connecting plate and tighten the locking screw.


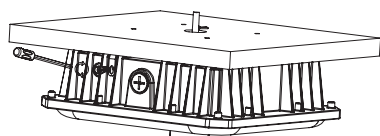


Black	○	Line
White	○	Neutral
Green	○	Ground
Purple	○	Dim +
Pink	○	Dim -

INSTALLATION INSTRUCTIONS


PENDANT MOUNT INSTALLATION WITH 3/4 INCH CONDUIT

1. Loosen the screw on the side of the housing and remove the connecting plate.

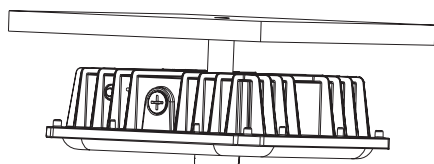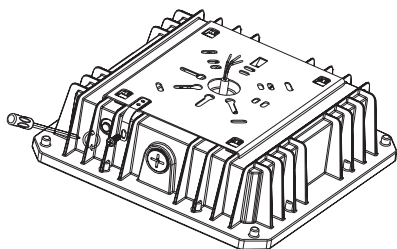

3. Screw the fixture and conduit pole together tightly. Ensure connection is weatherproof.

2. Connect the wires as shown below. If dimming leads (DIM+/DIM-) are not needed cap off and secure properly.

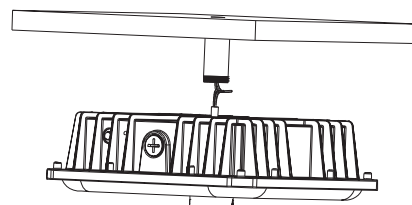

Black	Line
White	Neutral
Green	Ground
Purple	Dim +
Pink	Dim -

WATTAGE, CCT, & PHOTOCELL SETTINGS:

1. Power to fixture must be off. Remove coin plug caps and change settings as needed (Fig. 1).
2. Reinstall coin plug caps. Ensure o-ring gasket is present. Turn on power to fixture and verify operation.

OPTIONAL SENSOR INSTALLATION:

1. Remove sensor socket cap and install Z10 sensor (sold separately).
2. Confirm fixture is functional with sensor after install and adjust settings as needed.

*Sensor remote Z10-RC (sold separately) is required to adjust sensor settings.

FIG. 1

