


TAMBLITE

L I G H T I N G

Step 1:


Remove screws to remove light engine from body.
4 Plcs. Typ.

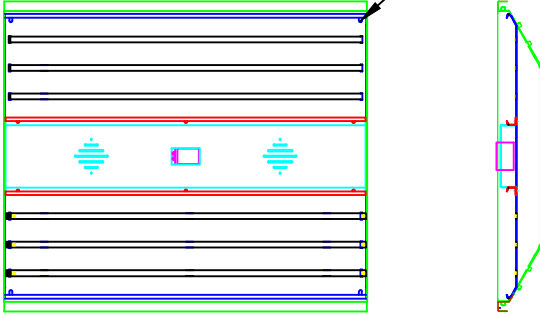

Step 2:

Remove screws holding both the
cover and lens retainer.
6 Plcs. Typ.

Back View:

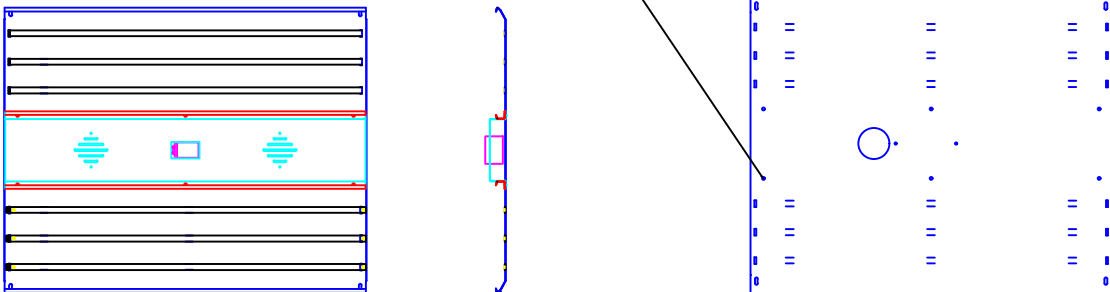

Step 3:

Adjust sensor to desired settings.
Reassemble when complete.

