

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	


SERIES SPECIFICATIONS

LXPC SERIES

The LXPC series thermoplastic LED exit sign and emergency lighting combination unit that offers long lamp life, energy efficiency and uniform illumination with round LED light heads.



LINE DRAWING

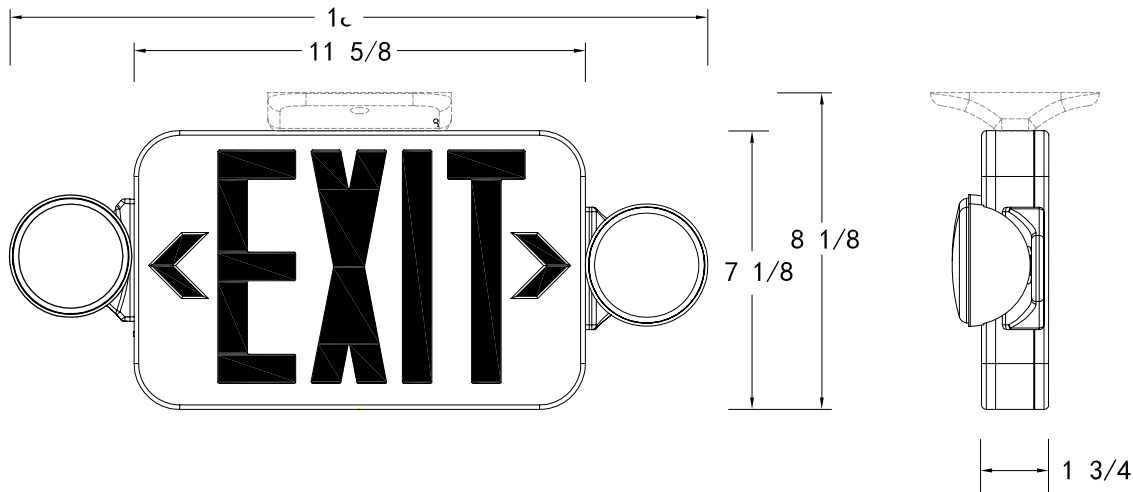

CONSTRUCTION

Housing

Injection molded, engineering grade, UV-stabilized, UL94-0, high impact resistant thermoplastic

Transfer switch

Internal solid-state transfer switch automatically connects the internal battery to lamp heads

Chevrons

Easy snap out chevron directional indicators

Remote Capacity\*

3.44W

Illumination

Two LED lamp heads with long life Red or Green LED letters.

Charger

Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Remote Compatibility\*

LSRH1 and LSRH2 - 3.6 Series



MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

## ELECTRICAL SPECIFICATIONS

Battery Type Rechargeable NiCad	Emergency Illumination Minimum 90 Minutes	Battery Recharge Time 24 Hours
Low Voltage Disconnect Prevents battery from deep discharge	LED Indicator Charge rate/power "ON" and push to test switch	Battery Discharge Time 1.5 Hours
Operating Voltage 120/277		

## AMPERAGE/WATTAGE

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
LXPC-RED	5.0	4.8	0.044	0.017
LXPC-GREEN	3.9	3.9	0.032	0.015

## MOUNTING SPECIFICATIONS

Surface mount via "easy connect" backplate, which fits most standard junction boxes	Snaps into place making internal electrical connections  Suitable for wall or ceiling mount	Conduit mounts using knockouts on the backplate or on top of the housing
---	---	--

## Options

SD Self-diagnostic test feature continually diagnoses unit's performance and tests system to ensure reliable operation and to meet electrical and life safety codes (Available in RC and HL versions)	RC Remote capable option will run two LED remote heads for 90 minutes.
HL Two high-lumen LED lamp heads	

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

## CERTIFICATIONS/WARRANTY

Listing  
UL Listed

Compliance  
Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Location Rating:  
Suitable for damp locations

### Warranty

Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing. Batteries are pro-rated for two years.

## ORDERING INFORMATION

Part Number: LXPC1RWEM

LXPC	3			EM	
SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
LXPC	[3] : Universal Single and Double Face	[G] : Green	[B] : Black	[EM] : Battery Backup Standard	[BLANK] : No Options
		[R] : Red	[W] : White		[HL] : High Lumen ?Heads
					[RC] : Remote Capable
					[SD] : Self Diagnostic

## REMOTE COMPATIBILITY CHART

Use the below charts to pick the correct voltage for your remote capable device.

### REMOTE COMPATIBILITY CHART

SERIES	ESRH SERIES		LSRH SERIES (LED)		
	6V	12V	3.6V	9.6V	MULTI
ESLFX-2				X	X
LXP-RC			X		X
LXPC-RC			X		X
EXDC-RC			X		X
EXWTC-RC			X		X
ESLR-1RC			X		X
LSR-1RC			X		X
ESR-16R-6S	X				X
LXPCP-RC				X	X
EXPCL-RC				X	X
ESR-16R-LED	X				X

SERIES	ESRH SERIES		LSRH SERIES (LED)		
	6V	12V	3.6V	9.6V	MULTI
ESR-1HO	X				X
LSDXR627	X				X
ESTFX-2	X				X
ESDXR6	X				X
ESDXRS6	X				X
ESDXR12		X			X
ESDXRS12		X			X
ESR-16R-12S		X			X
ESR-16R-LED12		X			X
EXP-RC	X				X
LXWTC-RC			X		X

## REMOTE COMPATIBILITY CHART

\*RC option only

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION