



| | |
|--------------|---------|
| CONTRACTOR: | |
| PROJECT: | DATE: |
| PREPARED BY: | MODEL#: |

DESCRIPTION



CLY 5CS Series

8" LED Panel Light

The CLY series recessed LED panel light provides a highly versatile, high quality option for retrofit and new work applications.



FEATURES AND SPECIFICATIONS

Construction:

Remote mount steel driver box. Aluminum housing on LED array with finned heat sinks. These combined- provide excellent heat dissipation to entire LED system.

Electrical:

120v-277v

Optics:

PMMA optic with PS diffuser.

Lighting Performance:

High lumen, ideal for commercial applications. Five CCT options provide excellent versatility.

Dimming:

Triac dimming, 10-100%
120V dimming only

Installation:

Remote mounted driver makes installation simple. Spring loaded clips on the LED array allow for quick installation- pulling the fixture flush to the mounting hole.

Listings:

ETL listed to US and Canadian safety standards. Wet location listed. IC Rated. For use in ambient operating temperatures ranging from -22°F to 104°F.

Ambient Operating Temperature:

-22°F to 104°F



Warranty:

5-year limited warranty.

NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

LINE DRAWING

Ceiling Opening: Ø 8 1/4"

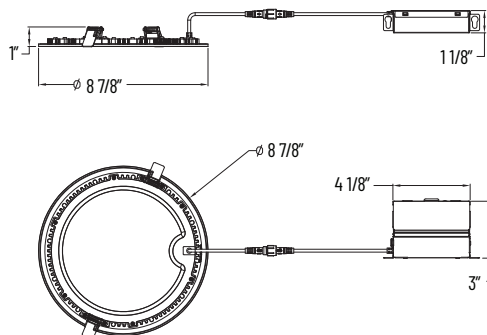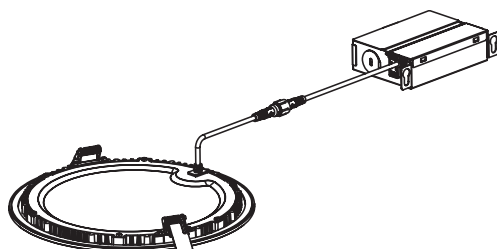



| | |
|--------------|---------|
| CONTRACTOR: | |
| PROJECT: | DATE: |
| PREPARED BY: | MODEL#: |

ORDERING INFORMATION

EXAMPLE: CLY8 5CS-WH

| SERIES | DESCRIPTION | CCT SELECTABLE | COLOR |
|-------------|--------------------|-------------------------------|-----------------|
| CLY8 5CS-WH | 8" LED Panel Light | 2700K/3000K/3500K/4000K/5000K | [-WH] : WHITE |

LIGHTING & ELECTRICAL SPECIFICATIONS

| SERIES | INPUT POWER | LPW | LUMENS @ 4000K | CRI | L70 (HOURS) |
|-------------|-------------|-----|----------------|-----|-------------|
| CLY8 5CS-WH | 17W | 94 | 1,600 | 80 | 50,000 |

| Input | |
|--------------------------|----------|
| Input Voltage (VAC) | 120-277v |
| Frequency Range (Hz) | 50-60 Hz |
| Efficiency @ Full Load | >87 |
| Power Factor @ Full Load | > 0.9 |

ACCESSORIES

*Accessories sold separately

ROUGH8

0446-0829

Rough-in plates 8"



ROUGH8-NP


0550-6458

Rough-in plates non-painted 8"



CUSTOM GOOF RINGS

Custom goof rings for any application



*Contact the factory for more information.

EXTENSION CABLES



0542-2791

20FT extension cord for CLY CCTA





CLY8 5CS-WH (4000K)

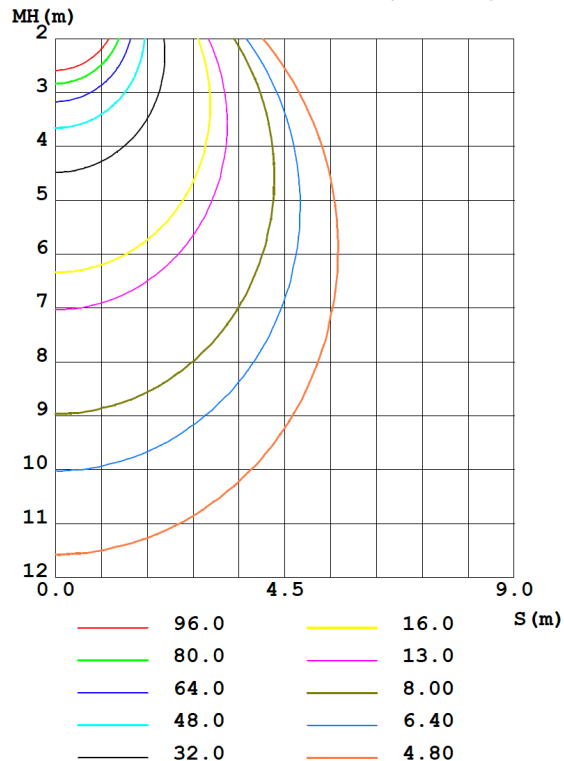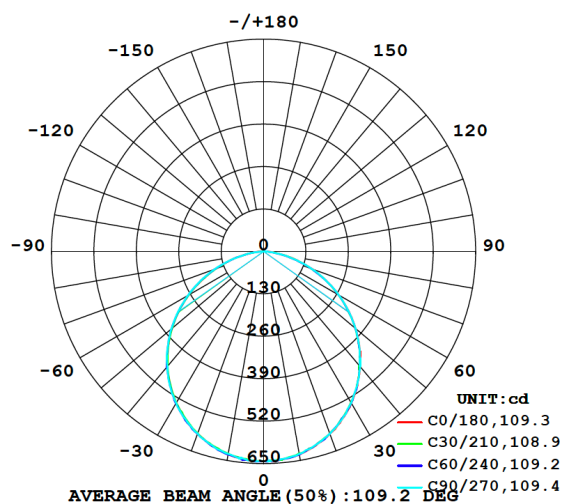



| | |
|--------------|---------|
| CONTRACTOR: | |
| PROJECT: | DATE: |
| PREPARED BY: | MODEL#: |

COMPATIBLE DIMMER LIST

| NO | BRAND | DIMMER ITEM NO |
|----|---------|----------------|
| 1 | LUTRON | MACL-153MR-WH |
| 2 | | TGCL-153P |
| 3 | | SCL-153PR-WH |
| 4 | | AY-600P |
| 5 | | SCL-153P-LA |
| 6 | | DVCL-153P |
| 7 | | MACL-153P |
| 8 | | CTCL-153P |
| 9 | | TG-600PH-WH |
| 10 | | LGCL-153P |
| 11 | | S-603PG-WH |
| 12 | | CTELV-303P-WH |
| 13 | | DV-600P |
| 14 | LEVITON | 6633-I |
| 15 | | IPI06-1LZ |
| 16 | | 6161-A |
| 17 | | 6633-POG |
| 18 | | 6631 |
| 19 | | 6633-PLW |
| 20 | | 6633-P |
| 21 | | 6674 |
| 22 | | IPI10-1LZ |
| 23 | | IPL06-10Z |
| 24 | | 6151 |
| 25 | | 6681 |
| 26 | GE | 45602 |
| 27 | | 55431 |