



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

**DESCRIPTION**



**PRF-5CS Series**

The PRF-5CS LED Retrofit kits are designed to be compatible with most recessed cans and come with an E26 MED Socket Adapter featuring an OJ-606 quick connector standard.



**CONSTRUCTION**

**Construction**  
Aluminum

**Optics**  
Opaque Acrylic Lens provides diffusion while sacrificing minimal lumen output

**Dimming**  
10-100% Triac Dimming  
120V Dimming Only

**Input Voltage**  
120-277 VAC

**Installation**  
Spring loaded clips on the PRF6 and tension clips on the PRF4 allow for quick installation into most recessed cans.


**Listings**  
ETL listed to US and Canadian safety standards. For use in ambient operating temperatures ranging from -22°F to 104°F.

**Warranty**  
5-year limited warranty.


NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

**LINE DRAWING**

**PRF4-5CS**  
Comes with 3 tension fin clips  
Compatible with most 4" recessed cans.

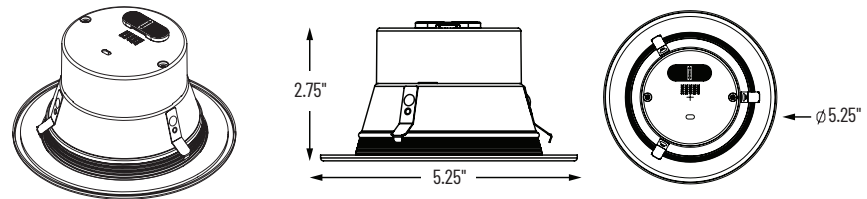

**PRF56-5CS**  
Comes with 2 torsion clips.  
Compatible with most 5" and 6" recessed cans.

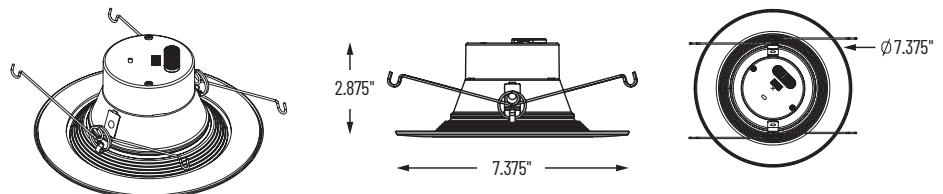

APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

**ORDERING INFORMATION**

EXAMPLE: PRF4-5CS-WH

SERIES	SIZE	COLOR TEMP.	TRIM COLOR
PRF	[ 4 ] : 4" [ 56 ] : 5/8"	[ -5CS ] : 2700/3000/3500/4000/5000K Color Select	[ -WH ] : White Color Trim

**LIGHTING & ELECTRICAL SPECIFICATIONS ELECTRICAL SPECIFICATIONS**

SERIES	LUMENS @ 3000K	LPW	WATTAGE	CRI
PRF4	1000	77	13	90
PRF6	1500	83	18	90

**ACCESSORIES**

\*Accessories sold separately

**CUSTOM GOOF RINGS**  
Contact Factory with inner and outer dimensions for more information.









CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

**PHOTOMETRICS**

**PRF4-5CS**

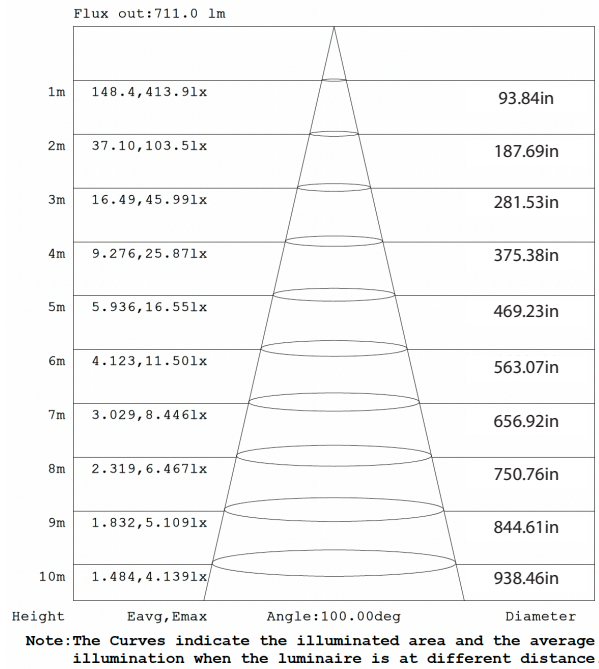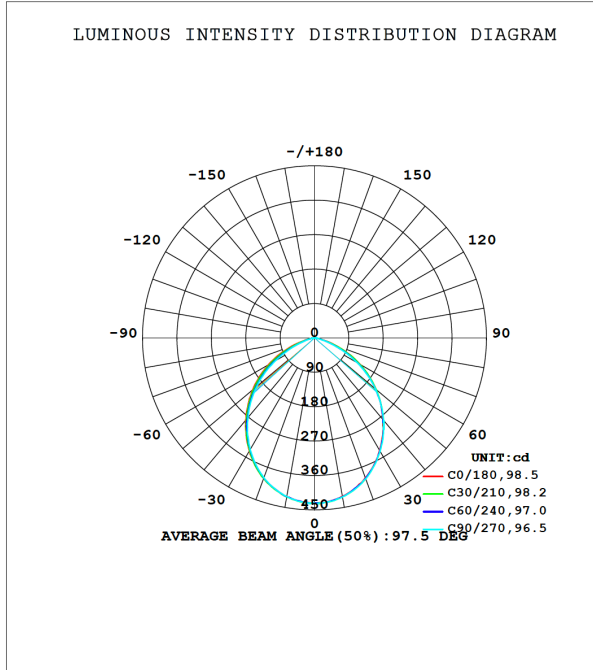

**PRF56-5CS**

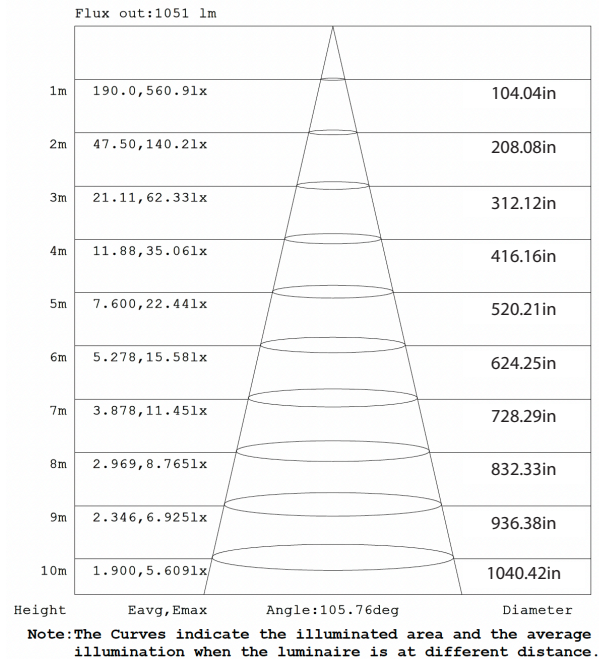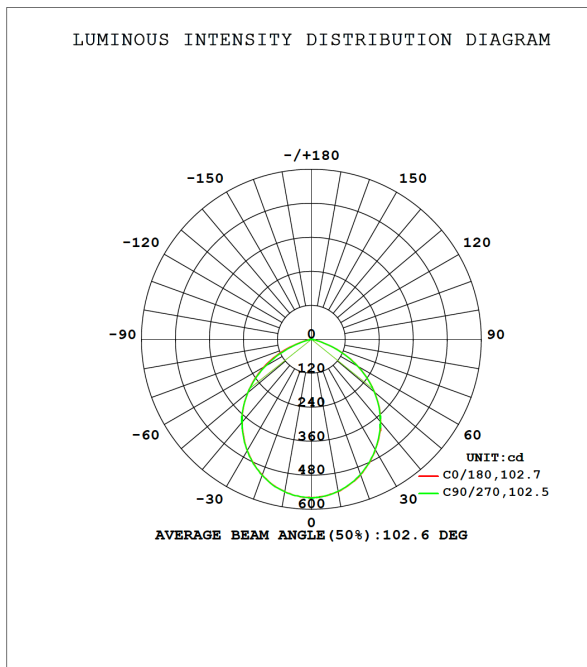

APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

**COMPATIBLE DIMMER LIST**

NO	BRAND	DIMMER ITEM NO
1	LUTRON	MACL-153M-WH
2		DVCL-153P-WH
3		NLV-600
4		NTLV-600
5		N-600
6		NTELV-600
7		SCL-153P-WH
8		STCL-153M-WH
9		CTCL-153P
14	LEVITON	IPL06-10Z

APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION