




CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

DESCRIPTION

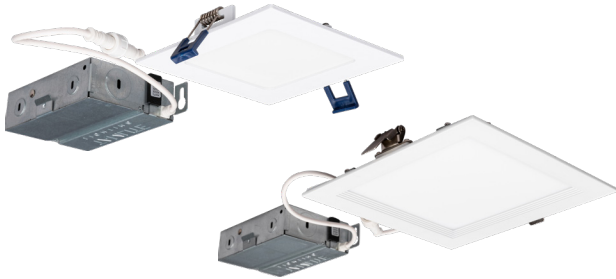

CLYSQ-5CS Series

The CLYSQ-5CS Series IC rated recessed LED square wafer light features a remote driver allowing the fixture to minimize vertical height without the need for additional housings.



FEATURES AND SPECIFICATIONS

Construction

Remote mounted steel driver box and Aluminum housing for the LED array.

Optics

Opaque Acrylic Lens provides diffusion while sacrificing minimal lumen output

Dimming

10-100% Triac Dimming
120V Dimming Only

Input Voltage

120-277 VAC

Installation

Spring loaded clips on the LED array allow for quick installation. Mounting Holes on the remote mounted driver allow for the unit to be secured to joists.

Listings

ETL listed to US and Canadian safety standards. For use in ambient operating temperatures ranging from -22°F to 104°F.

Warranty

5-year limited warranty.


IMPORTANT: In order to maintain proper operation and warranty coverage for units with Emergency backup, the battery must be recharged once per year prior to installation.

NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

LINE DRAWING

LED PANEL LIGHT SQUARE

	CLY4SQ	CLY4SQB	CLY6SQ	CLY6SQB
WAFER DIMENSIONS				
A	0.84"	1.125"	0.768"	1.125"
B		4.75"		6.75"
C		4.75"		6.75"
DRIVER DIMENSIONS				
D		1.17"		3.187"
E		4.125"		4.06"
F		3"		
CEILING OPENING	4-1/4" x 4-1/4"	6-1/4" x 6-1/4"	4-1/4" x 4-1/4"	6-1/4" x 6-1/4"

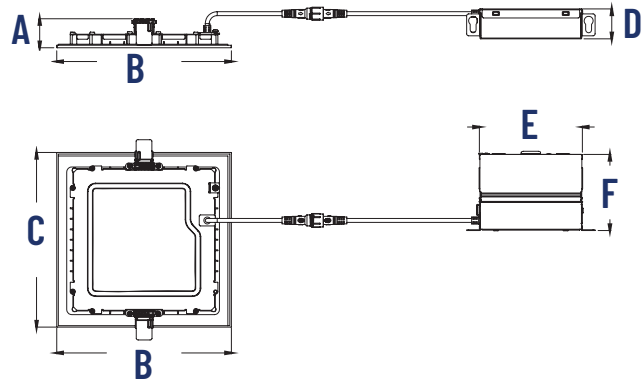



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

ORDERING INFORMATION

EXAMPLE: CLY4SQ-5CS-WH

SERIES	SIZE	TRIM	COLOR TEMPERATURE	TRIM COLOR
CLY	[4] : 4" [6] : 6"	[SQ] : Square Flat Wafer Trim [SQB] : Square Baffled Reflector	[-5CS] : 2700/3000/3500/4000/5000K Color Select	[-WH] : White Color Trim

LIGHTING & ELECTRICAL SPECIFICATIONS

SERIES	LUMENS @ 3000K	LPW	WATTAGE	CRI
SQUARE FLAT WAFER TRIM				
CLY4SQ-5CS-WH	920	76	12	90
CLY6SQ-5CS-WH	1200	80	15	90
SQUARE BAFFLED REFLECTOR				
CLY4SQ-5CS-WH	920	76	12	90
CLY6SQ-5CS-WH	1200	80	15	90

ACCESSORIES


*Accessories sold separately

ROUGH IN PLATES

ROUGH4SQ-NP
0539-4444
MF-NON PAINTED ROUGH
PLATE FOR CLY4SQ



ROUGH6SQ-NP
0539-4447
MF-NON PAINTED ROUGH
PLATES FOR CLY6SQ



CLY-CCTA-EXT-20
0542-2791
20FT EXTENSION
CORD FOR CLY-5CS



CUSTOM GOOF RINGS
Contact Factory with inner
and outer dimensions for
more information.



*Contact the factory for more information.



APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION





CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

PHOTOMETRICS

CLY4SQ @3000K

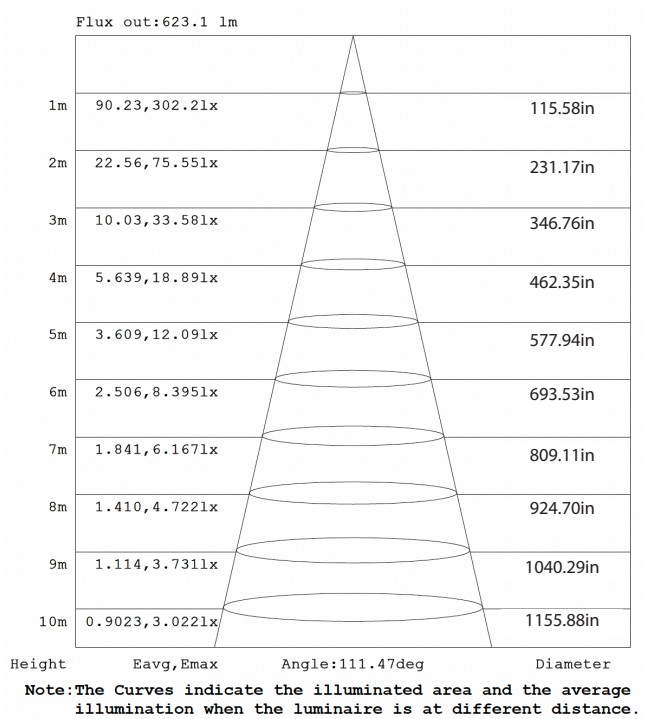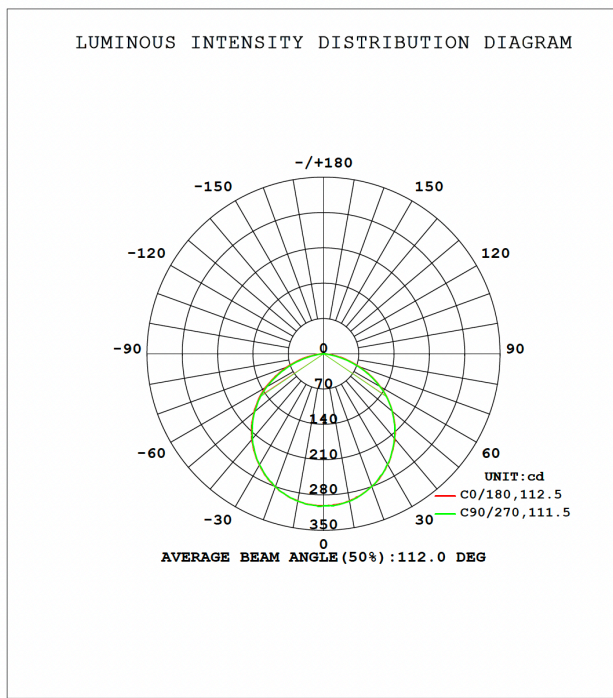

CLY6SQ @3000K

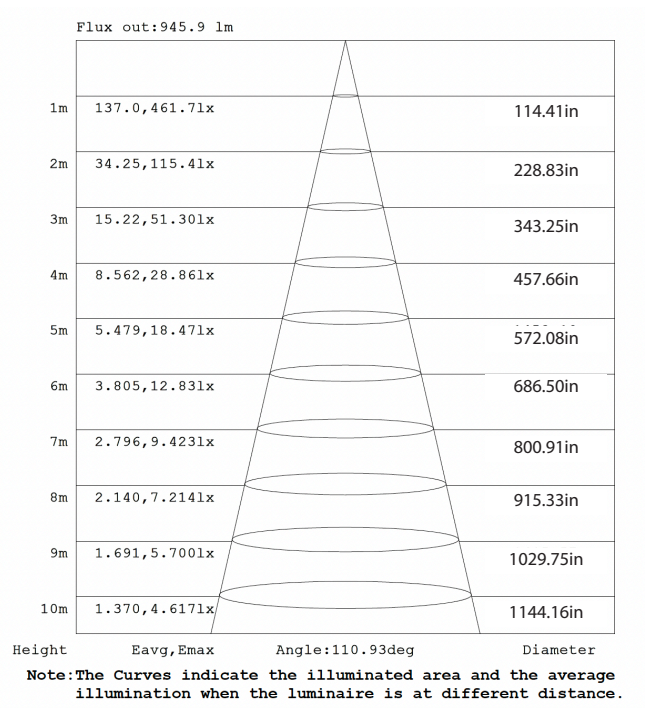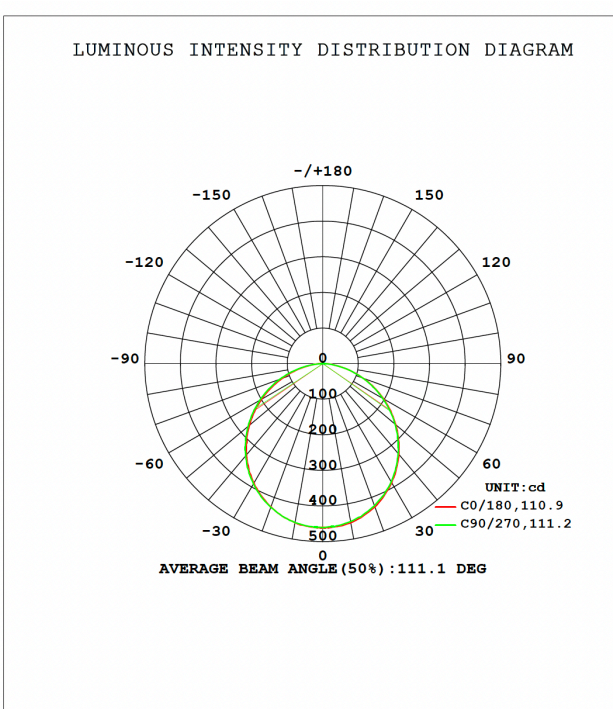



APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION





CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

PHOTOMETRICS

CLY4SQB @3000K

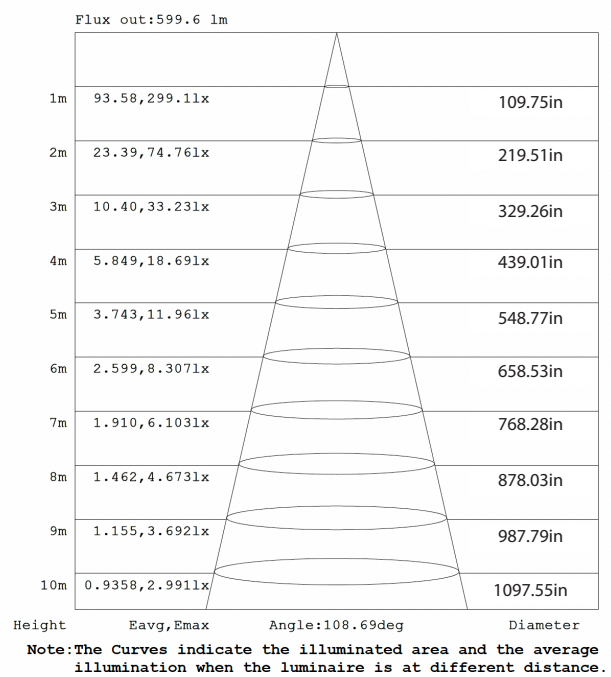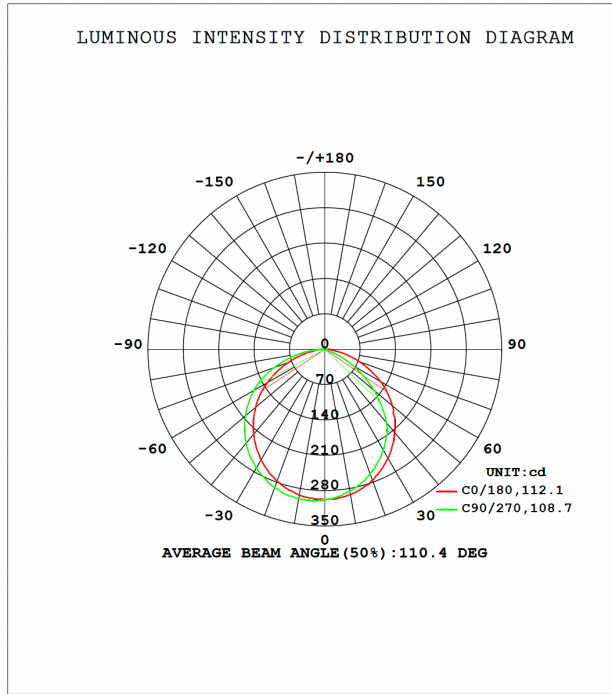

CLY6SQB @3000K

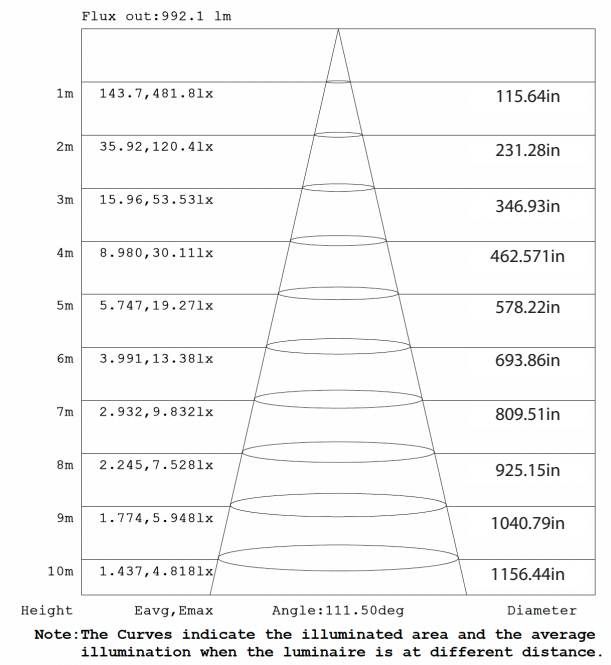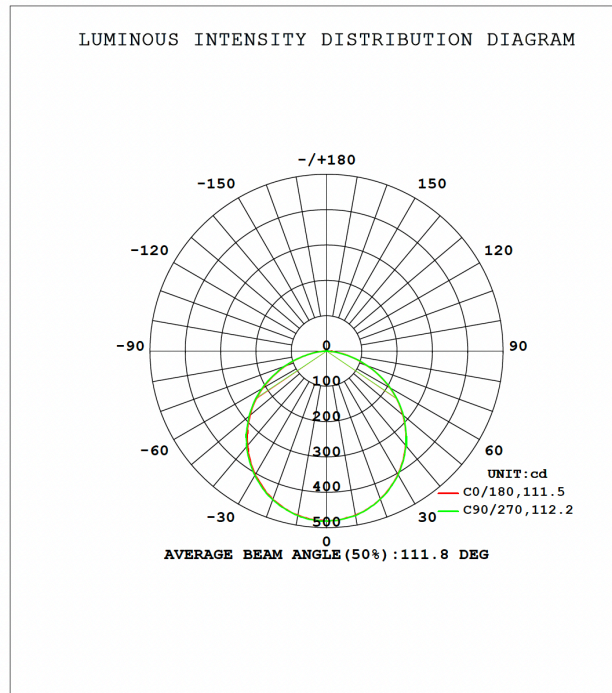

APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

COMPATIBLE DIMMER LIST

NO	BRAND	DIMMER ITEM NO
1	LUTRON	MACL-153M-WH
2		DVCL-153P-WH
3		NLV-600
4		NTLV-600
5		N-600
6		NTELV-600
7		SCL-153P-WH
8		STCL-153M-WH
9		CTCL-153P
14	LEVITON	IPL06-10Z

APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION