



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

DESCRIPTION



SLW Series

Fluorescent Strip Wide

The SLW wide strip series is suitable for general propose lighting in a wide variety of environments. Great fit for any commercial, industrial, retail or warehouse lighting applications.



FEATURES

Housing

The body is constructed of 24 gauge, made in USA commercial grade steel with hot dip galvanized finish (6.5µm on both sides).
Finish: Paint after fabrication (PAF) of galvanized body adds high resistance to rust over its lifetime.

Electrical Details

NEC required ballast disconnect pre-installed

Installation

This fixture may be suspended via optional cable hanging kit or surface mounted on surfaces such as ceilings and walls. This fixture has numerous knockouts for easy installation.

Listing

UL listed and suitable for damp locations.

Warranty


Guaranteed for five year from the purchase date of the product, against mechanical defects in manufacturing.

Assembled in the USA

NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

LINE DRAWINGS

DIMENSIONS	L	W	H
2FT	24"	4.5"	3.375"
4FT	48"	4.5"	3.375"
8FT	96"	4.5"	3.375"

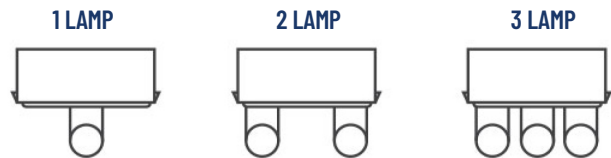

APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

SPECIFICATIONS

Example: SLW2432D

SERIES	LAMP QTY	LENGTH	LAMP WATTAGE*	VOLTAGE	BALLAST OPTION
SLW	[1] : 1 Lamp [2] : 2 Lamp [3] : 3 Lamp [4] : 4 x 4 ft Lamp (4: = 8 ft. Tandem) [6] : 3 x 4 ft Lamp (6: = 8 ft. Tandem)	[2] : 2ft [4] : 4ft [8] : 8ft	[17] : 17W T8 [25] : 25W T8 [32] : 32W T8 [44] : 44W T8HO [60] : 60W T12HO [59] : 59W T8 8FT [86] : 86W T8HO 8FT [110] : 110W T12HO 8FT	[D] : 120-277V	[BLANK] : No Options [K] : 120-277V (2 ballast)** [PS] : 120-277V Program Rapid Start [DIM] : 120-277V 0-10V Series Elec. Dimming [LPF] : 0.77 Low Ballast Factor 120-277V [M1] : 1.00 Medium Ballast Factor 120-277V [HPF] : 1.18 High Ballast Factor 120-277V [-EM] : Emergency Backup

*Lamps not included.

** Consult factory for 2' fixture builds. 3 & 6 Lamp configurations do not work with T12HO, T8HO and 59W lamps.

ACCESSORIES



**Suspension Cables:
10' Suspension Kit
TAMGRIP-10FT-KIT (0553-3296)**

Single point suspension that allows two point to be suspended using one fastener. Two legs improve center of gravity and increases stability. Ideal for services that require maintenance.

Sold Separately.