



MODEL :	TYPE	
PROJECT :		
PREPARED BY :	DATE :	

SPECIFICATIONS

5" IC Air-Tight New Work Housing
 Line Voltage: 120V - 75W R/PAR30, 60W A19



LINE DRAWING

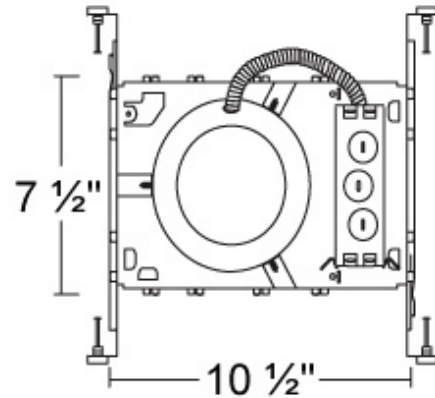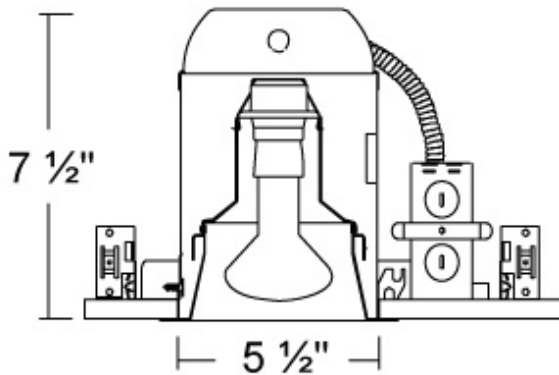

CONSTRUCTION

HOUSING

IC rated air-tight housing, thermally protected against misuse of insulation materials and improper lamping
 J-box is listed for through-branch circuit wiring with (6) 1/2" knockouts, (1) 3/4" knockout and (4) pry-outs Romex cable clamp
 Housing adjusts to accommodate various ceiling thicknesses
 Pre-installed hanger bars allow for free positioning within a 24" joist span
 Triangulated bar hangers with nails and leveling tab on the footprint
 Bar hangers are designed to fit T-bar spine without additional clamps for drop ceiling usage
 7 1/2" height allows use in 2" x 8" construction

SOCKET

Medium base porcelain socket on adjustable mounting bracket for proper lamp positioning

LISTINGS/RATINGS

LISTINGS/RATINGS/COMPLIANCE

UL, C-UL listed for damp location, feed through wiring and direct contact with insulation.

Certified under ASTM-E283 for Airtight Construction

WARRANTY

WARRANTY

Guaranteed one year from the purchase date of the product, against mechanical defects in manufacturing.

NOTES

NOTES

Product performance may vary depending on model and end user environment.



TAMLITE
LIGHTING

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ORDERING INFORMATION

Sample Part Code: IC205AT

IC	205	AT
SERIES	HOUSING	TYPE
IC	205	[AT] : Air Tight

