



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

DESCRIPTION



TATFLL SERIES

The TATFLL floodlight is a versatile unit with multiple mounting options that satisfy many of your lighting applications. The TATFLL can be adjusted to almost any position to direct the light where needed.



CONSTRUCTION

Housing

Die cast aluminum housing, with a finned heat sink designed to dissipate heat efficiently.

Finish

Durable bronze powder coat paint.

Thermal Management

Raised stand-offs provide even heat dissipation; requires no additional heat sinking

Lens Type

Clear Pattern polycarbonate Lens

Mounting

Yoke mount or knuckle mount

Listings




UL listed to US safety standards. Suitable for wet locations.

Warranty




5-year limited warranty.

LINE DRAWING

15W

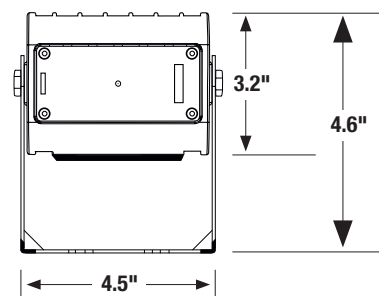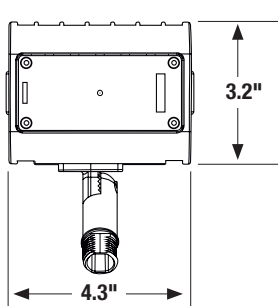

30W

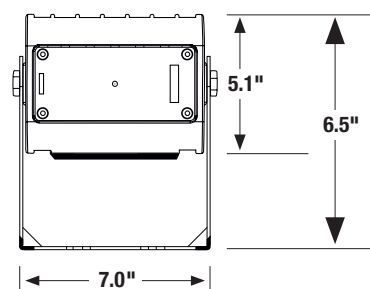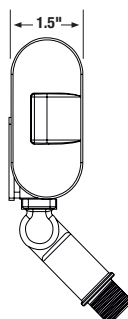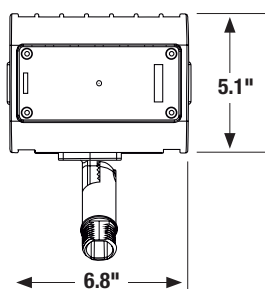




CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

LINE DRAWING

50W

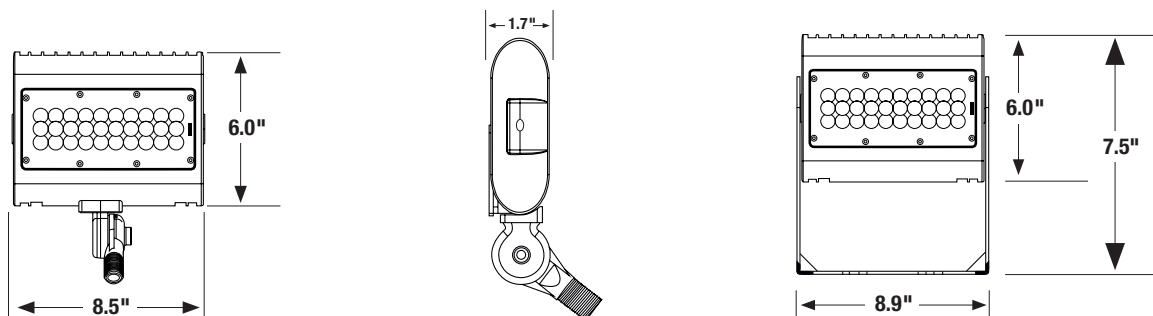

PERFORMANCE SPECIFICATIONS

	15W	30W	50W
Input Voltage	100-277VAC	100-277VAC	100-277VAC
Frequency	50/60Hz	50/60Hz	50/60Hz
Input Current	0.18A MAX	0.35A MAX	0.6A MAX
Input Wattage	15W	29.5W	48.1W
Power Factor	>0.90	>0.90	>0.90
Efficacy	126 LM/W	133 LM/W	132 LM/W
LED Efficacy	120 LM/W	120 LM/W	120 LM/W
Lumens	1863Lm	3973Lm	6219Lm
Color Temp	5000K	5000K	5000K
Lifespan	50000Hrs.	50000Hrs.	50000Hrs.
CRI	>80	> 80	> 80
Beam Angle	120 X 90°	120 X 90°	120 X 90°
Operating Temp	-20°C- +40°C	-20°C- +40°C	0°C- +40°C
Ambient Temperature	-35°C (-31°F) -50°C (122°F)		
Driver Efficiency	88%	88%	88%



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

ORDERING INFO

EXAMPLE: TATFLL3015BZK

SERIES	COLOR TEMP.	LAMP WATTAGE	FINISH	MOUNTING
TATFLL	[30] : 3000K	[15] : 15 WATTS [30] : 30 WATTS	[BZ] : BRONZE [WH] : WHITE	[K] : 1/2" KNUCKLE MOUNT
	[40] : 4000K	[15] : 15 WATTS [30] : 30 WATTS [50] : 50 WATTS	[BZ] : BRONZE	[K] : 1/2" KNUCKLE MOUNT
	[50] : 5000K	[15] : 15 WATTS [30] : 30 WATTS [50] : 50 WATTS	[BZ] : BRONZE [WH] : WHITE*	[BLANK] : YOKE MOUNT [K] : 1/2" KNUCKLE MOUNT*

* Not Available on 30W @ 5000K