



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: LXPC3MWEM-CS

SERIES SPECIFICATIONS



LXPC-CS Series

Thermoplastic LED exit sign and emergency lighting combination unit

The LXPC series thermoplastic LED exit sign and emergency lighting combination unit that offers long lamp life, energy efficiency and uniform illumination with round LED light heads.



Multicolor LED's:

CONSTRUCTION

Housing

Injection molded, engineering grade, UV-stabilized, UL94-0, high impact resistant thermoplastic

Transfer switch

Internal solid-state transfer switch automatically connects the internal battery to lamp heads

Chevrons

Easy snap out chevron directional indicators


Illumination

Two LED lamp heads with long life Red or Green LED letters.

Charger

Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

LINE DRAWING

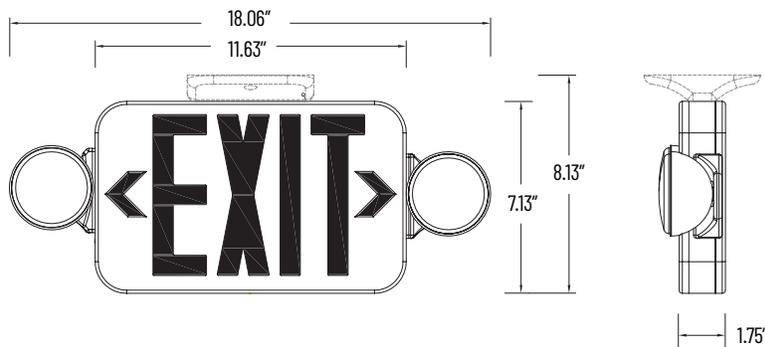



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: LXPC3MWEM-CS

ELECTRICAL SPECIFICATIONS

Battery Type

EFB-NIC-3.6V-900

Emergency Illumination

Minimum 90 Minutes

Battery Discharge Time

1.5 Hours

Low Voltage Disconnect

Prevents battery from deep discharge

LED Indicator

Charge rate/power "ON" and push to test switch

Operating Voltage

120/277

Battery Recharge Time

24 Hours

MOUNTING SPECIFICATIONS

- Surface mount via "easy connect" back-plate, which fits most standard junction boxes
- Snaps into place making internal electrical connections
- Suitable for wall or ceiling mount
- Conduit mounts using knockouts on the backplate or on top of the housing

CERTIFICATIONS/WARRANTY

Listing

UL Listed

Warranty

Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing. Batteries are pro-rated for two years.

Location Rating

Suitable for damp locations

Compliance

Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

ORDERING INFORMATION

EXAMPLE: LXPC3MWEM-CS

SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTION
LXPC	[3] : Universal Single and Double Face	[M] : Multicolor (Green and Red)	[W] : White	[EM] : Battery Backup Standard	[-CS] : Color Selectable