



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

## DESCRIPTION



## SLWLEDT Series

The SLWLEDT wide strip series is suitable for general propose lighting in a wide variety of environments. The LEDT Series offered by Tamlite Lighting are designed and UL listed to work with LED tubes. The LEDT Series is designed to reduce contractor installation time by adding the tubes at the factory while still keeping the UL Listing of the fixture.



## FEATURES & SPECIFICATIONS

### Input Voltage

120-277 VAC

### Frequency

50/60Hz

### Operating Temp

-20°C ~ 45°C (-4°F ~ 113°F)

### Storage Temp

-40°C ~ 85°C (-40°F ~ 185°F)

### CRI

82

### Lamp Shape

Linear

### Power Factor

0.9

### Lamp Style

Linear T8

### Socket Type

G13 Bi-pin

### Construction

The body is constructed of 24 gauge, made in USA commercial grade steel with hot dip galvanized finish (6.5µm on both sides). Finish: Paint after fabrication (PAF) of galvanized body adds high resistance to rust over its lifetime.

### Mounting

Continuous row mounting capability using a chase nipple. Numerous knockouts for easy installation. This fixture may be suspended via optional cable hanging kit.

### Listing

UL listed to US and Canadian safety standards. Damp location listed. Fixtures are Assembled in America.

### Warranty

Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing.

### Made in the USA


NOTE: Actual performance may differ as a result of end-user environment and application. All values are designed or typical values, measured under laboratory conditions at 20°C. Specifications subject to change without notice



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

## LINE DRAWINGS

DIMENSION	L	W	H
2FT	24"	4.5"	3.8"
4FT	48"	4.5"	3.8"
8FT	96"	4.5"	3.8"

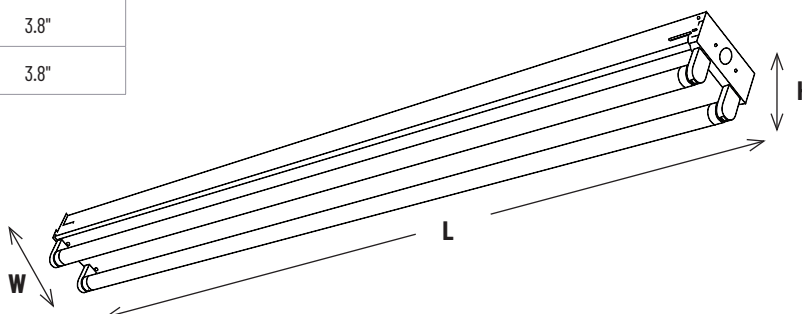

## ORDERING INFORMATION

Example: SLWLEDT2-8D1L840

SERIES	LENGTH	LAMP WATTAGE	LAMP QTY	LAMP WIRING	OPTIONS
SLWLEDT	[ 2 ] : 2FT [ 4 ] : 4FT [ 8 ] : 8FT*	[ Blank ] : No Lamps [ -8 ] : 8W Lamp** [ -18 ] : 18W Lamp***	[ D1 ] : 1 Lamp [ D2 ] : 2 Lamps [ D4 ] : 4 Lamps****	[ Blank ] : Single Ended W/O Lamps [ -DE ] : Double Ended W/O Lamps	[ Blank ] : No Options [ -EM ] : Emergency Backup***** [ -OS ] : Occupancy Sensor [ -WG ] : Wire Guard [ -W6-3 ] : Flex Whip-6' 3 Wire***** [ -WC6-515 ] : Cord-6' SJ-515 Plug*****
				<b>CRI &amp; COLOR TEMP</b>	
				[ L840 ] : 4000K [ L850 ] : 5000K [ -3CS ] : 3000/4000/5000K	

\*8FT fixtures use 4FT tubes in Tandem, for 8FT tube fixtures see the product matrix below.

\*\*Option only available on 2FT fixture, lamped 2FT fixtures only available in -3CS.

\*\*\*Option only available on 4 FT & 8 FT fixtures.

\*\*\*\*Option only available on 8 FT fixture.

\*\*\*\*\* More options available please contact factory.

\*\*\*\*\*Option only available on single color (L840 & L850) fixtures.

## SLWLEDT8 WITH 8FT TUBES

Example: SLWLEDT8-D1-DE96-FA8

SERIES	LENGTH	LAMP QTY	LAMP TYPE*	LAMP HOLDER	OPTIONS
SLWLEDT	[ 8 ] : 8FT	[ D1 ] : 1 Lamp [ D2 ] : 2 Lamps	[ -DE96 ] : Double Ended 96" Tube	[ -FA8 ] : Single Pin Lamp Holder [ -R17D ] : HO Lamp Holer	[ Blank ] : No Options [ -EM ] : Emergency Backup [ -OS ] : Occupancy Sensor [ -WG ] : Wire Guard [ -W6-3 ] : Flex Whip-6' 3 Wire***** [ -WC6-515 ] : Cord-6' SJ-515 Plug*****



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

## LAMP SPECIFICATIONS

SERIES	LAMP WATTAGE (PER LAMP)	EFFICACY (PER LAMP)	LAMP OPERATING CURRENT (PER LAMP)	LAMP LUMENS (PER LAMP)	CRI	NUMBER OF LEDS (PER LAMP)
SLWLEDT2	8 Watts	125 lm/W	35-80 mA	1000 lm	82 CRI	44
SLWLEDT4	18 Watts	122 lm/W	65-155 mA	2200 lm	82 CRI	80
SLWLEDT8*	18 Watts	122 lm/W	65-155 mA	2200 lm	82 CRI	80

\*Tandem 8FT fixture only.

## ACCESSORIES

\* Accessories sold separately.

**TAMGRIP-10FT-KIT**  
ALL IN ONE, 10FT HANGER KIT  
0553-3296



**SLW4-RFL-KIT**  
MF-4FT REFLECTOR KIT FOR SLWLEDT  
0268-8846



**SLW8-RFL-KIT**  
MF-8FT Reflector Kit for SLWLEDT  
0268-8849



**SLW4-SRFL-KIT**  
MF-4FT Slotted Reflector Kit for SLWLEDT  
0268-7691



**SLW8-SRFL-KIT**  
MF-8FT Slotted Reflector Kit for SLWLEDT  
0268-7694

