



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

IC206RAT

SERIES SPECIFICATIONS

Tamlite Lighting's IC206RAT is designed for remodel installations with a designated quick connect cable. Suitable for use in ceilings where the housing can be in direct contact with insulation. Airtight construction reduces energy costs by reducing the amount of air leakages through the ceiling.



Max lamp wattage: 75W Incandescent

7 1/2" height allows use in 2" x 8" construction

Knockouts
(6) 1/2" , (1) 3/4"

Pryouts
(4) Romex pryout with strain relief

Housing
Adjusts to accommodate various ceiling thicknesses

Socket
Medium base porcelain socket on adjustable mounting bracket for proper lamp positioning



LAMP SPECIFICATIONS

Base Type: E26 Base

ELECTRICAL SPECIFICATIONS

Rated Input Voltage: 120VAC

CERTIFICATIONS

Code Compliance: UL , cULus Listed for Feed Through , cULus Listed for Damp Location

Construction Standard: Certified under ASTM-E283 for Airtight Construction

Performance Certifications: IC Rated / Air Tight

Safety Certifications: UL Listed



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:



ENVIRONMENTAL SPECIFICATIONS

UL Location Rating: Damp Location

PHYSICAL SPECIFICATIONS

Housing Material: Galvanized Steel
Maximum Overall Diameter: 13.25in.
Maximum Overall Length: 13.25in.

Weight: 2.35lbs

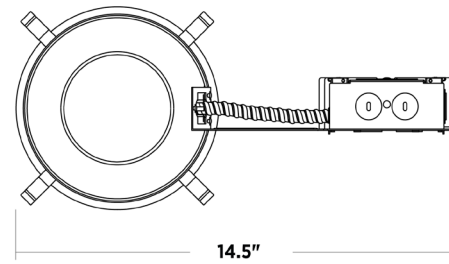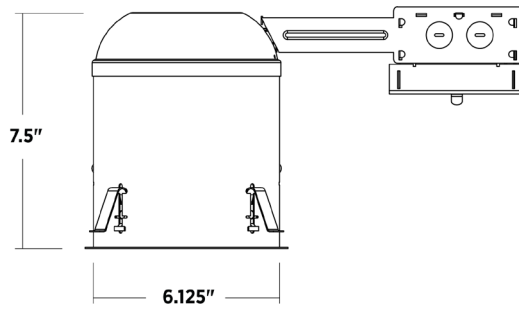

WARRANTY INFORMATION

Warranty: 1 Year



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

SAMPLE PART #: IC206RAT

SERIES	CONFIGURATION	TYPE
IC	[206] : 6"	[RAT] : Remodel Air-Tight

SHIPPING SPECIFICATIONS

Master Case

Height: 8 in.
Length: 21 in.
QTY: 6

QTY UOM: EA
Weight: 15lbs
Width: 21in.

Pallet

QTY: 144
QTY UOM: EA