



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

IC406R

SERIES SPECIFICATIONS

Tamlite Lighting's IC406R is designed for shallow remodel installations. Suitable for use in ceilings where the housing can be in direct contact with insulation. Airtight construction reduces energy costs by reducing the amount of air leakages through the ceiling.

Max lamp wattage: 75W R/PAR30, 60W A19

5 1/2" height allows use in 2" x 6" construction

Knockouts

(6) 1/2" , (1) 3/4"

Pryouts

(4) Romex pryout with strain relief

Housing

Adjusts to accommodate various ceiling thicknesses

Socket

Medium base porcelain socket on adjustable mounting bracket for proper lamp positioning

Ceiling Cut Out Size

6.31"



LAMP SPECIFICATIONS

Base Type: E26 Base

Lamp Type: R30 / PAR30 / A19

ELECTRICAL SPECIFICATIONS

Rated Input Voltage: 120VAC



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

CERTIFICATIONS

Code Compliance: UL , cULus Listed for Feed Through , cULus Listed for Damp Location
Construction Standard: Certified under ASTM-E283 for Airtight Construction
Performance Certifications: IC Rated / Air Tight
Safety Certifications: UL Listed

ENVIRONMENTAL SPECIFICATIONS

UL Location Rating: Damp Location



PHYSICAL SPECIFICATIONS

Housing Material: Galvanized Steel
Maximum Overall Diameter: 13.25in.
Maximum Overall Length: 13.25in.

Weight: 1.5lbs



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

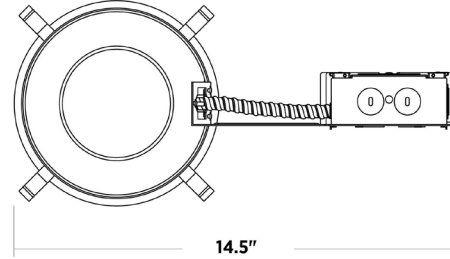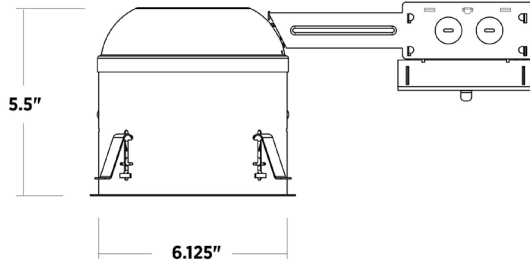

WARRANTY INFORMATION

Warranty: 1 Year



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

SAMPLE PART #: IC406R

SERIES	SIZE	Type
IC	[406] : 6" Shallow	[R] : Remodel

SHIPPING SPECIFICATIONS

Master Case

Height: 6.5in.
Length: 21in.
QTY: 6

QTY UOM: EA
Weight: 11.5lbs
Width: 20in.

Pallet

QTY: 168
QTY UOM: EA