



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

IC104AT

SERIES SPECIFICATIONS

Tamlite Lighting's IC104AT is designed for new construction installations. Suitable for use in ceilings where the housing can be in direct contact with insulation. Airtight construction reduces energy costs by reducing the amount of air leakages through the ceiling.



Max lamp wattage: 50W R/PAR20

5 1/2" height allows use in 2" x 6" construction

Bar Hangar

Designed to fit T-Bar spine without additional clamps for drop ceiling usage. Triangulated bar hangers with double headed nails and leveling tab on the footprint.

Knockouts

(6) 1/2" , (1) 3/4"

Pryouts

(4) Romex pryout with strain relief

Housing

Adjusts to accommodate various ceiling thicknesses

Socket

Medium base porcelain socket on adjustable mounting bracket for proper lamp positioning



LAMP SPECIFICATIONS

Base Type: E26 Base

Lamp Type: PAR20

ELECTRICAL SPECIFICATIONS

Rated Input Voltage: 120VAC



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

CERTIFICATIONS

Code Compliance: UL , cULus Listed for Feed Through , cULus Listed for Damp Location
Construction Standard: Certified under ASTM-E283 for Airtight Construction
Performance Certifications: IC Rated / Air Tight
Safety Certifications: UL Listed

ENVIRONMENTAL SPECIFICATIONS

UL Location Rating: Damp Location



PHYSICAL SPECIFICATIONS

Housing Material: Galvanized Steel
Maximum Overall Length: 8.5in.

Weight: 2.41lbs



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

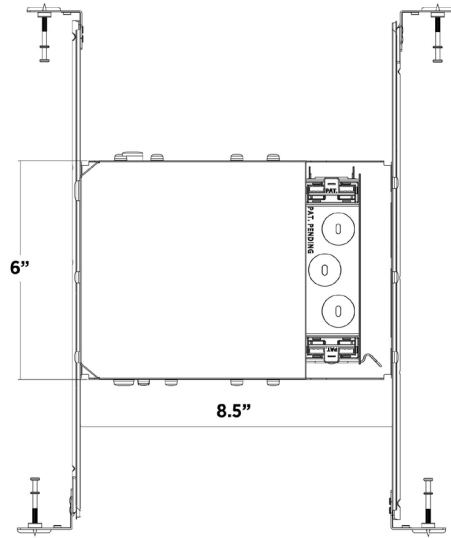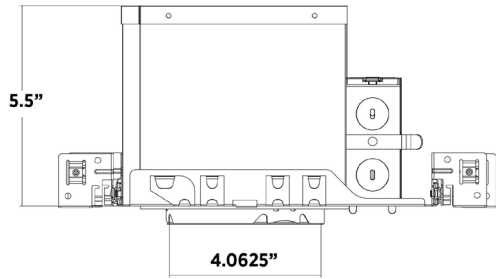

WARRANTY INFORMATION

Warranty: 1 Year



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

SAMPLE PART #: IC104AT

SERIES	CONFIGURATION
IC	[104AT] : 4" New Work

SHIPPING SPECIFICATIONS

Package

Height: 7.09 in.
Length: 20.28 in.
QTY: 6

Weight: 15.55lbs
Width: 20in.

Master Case

Height: 7in.
Length: 20in.
QTY: 6

QTY UOM: EA
Weight: 16.55lbs
Width: 20in.

Pallet

QTY: 264
QTY UOM: EA