



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

LSR-1RC

SERIES SPECIFICATIONS

The LSR Series LED Emergency Light delivers reliable egress illumination during a power outage. Featuring high-output LEDs, a long-life Ni-Cad battery, and adjustable lamp heads. The snap-together housing allows for easy installation. Ideal for commercial, institutional, and retail applications.



LUMINAIRE SPECIFICATIONS

Lumen Output: 144lm
Luminaire Type: Emergency Light

ELECTRICAL SPECIFICATIONS

Input Frequency: 50Hz / 60Hz
Rated Input Voltage: 120VAC / 277VAC

Wattage: 0.85W

EMERGENCY SPECIFICATIONS

Battery Recharge Time: 24hr
Emergency Certifications: UL924

Emergency Runtime: 90Minutes

CERTIFICATIONS

Performance Certifications: Title 20
Safety Certifications: cULus Listed

ENVIRONMENTAL SPECIFICATIONS

Temperature Rating Range: 20-30°C
UL Location Rating: Damp Location


PHYSICAL SPECIFICATIONS

Finish Color: White
Height: 4 3/4in.
Housing Material: Thermoplastic
Length: 9in.
Lens Material: Polycarbonate

Lens Type: Clear Optics
Mounting: Surface
Width: 2 3/4in.



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

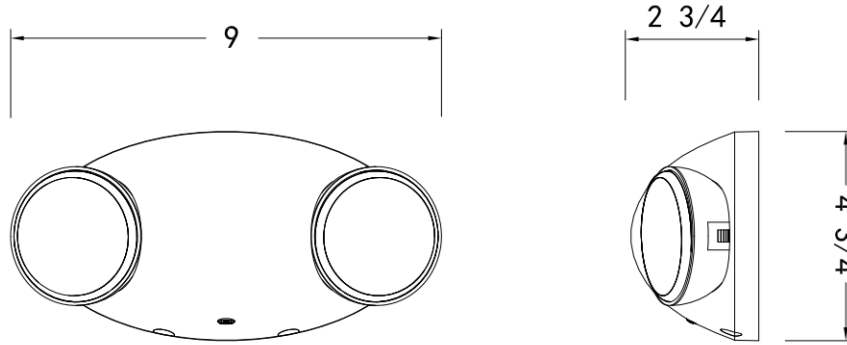

WARRANTY INFORMATION

Warranty: 5 Years

NOTES

- Universal J-box pattern knock-out
- Universal mounting plate with quick-connect feature
- Remote-Capable version offers up to an additional 3.44 Watts for 90 minutes
- Replacement battery 3.6V rechargeable Ni-Cad 1800mAh



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

EXAMPLE: LSR-1HL

SERIES	HOUSING	LUMEN	OPTIONS
LSR-1	[Blank]: White [B]: Black	[HL]: High Lumens	[RC]: Remote Capable [SD]: Self-Diagnostic

SHIPPING SPECIFICATIONS

Case

Length: 10.5 in.
QTY: 1

Weight: 1.25lbs
Width: 5 in.

Master Case

Height: 10.75 in.
Length: 20.5 in.