



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

## IC104RAT

### SERIES SPECIFICATIONS

Tamlite Lighting's IC104RAT is designed for remodel installations. Suitable for use in ceilings where the housing can be in direct contact with insulation. Airtight construction reduces energy costs by reducing the amount of air leakages through the ceiling.

Max lamp wattage: 50W R/PAR20

5 1/2" height allows use in 2" x 6" construction

**Knockouts**  
(6) 1/2" , (1) 3/4"

**Pryouts**  
(4) Romex pryout with strain relief

**Housing**  
Adjusts to accommodate various ceiling thicknesses

**Socket**  
Medium base porcelain socket on adjustable mounting bracket for proper lamp positioning

**Ceiling Cut Out Size**  
4.22"



### LAMP SPECIFICATIONS

**Base Type:** E26 Base  
**Lamp Type:** PAR20

### ELECTRICAL SPECIFICATIONS

**Rated Input Voltage:** 120VAC



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

## CERTIFICATIONS

**Code Compliance:** UL , cULus Listed for Feed Through , cULus Listed for Damp Location  
**Construction Standard:** Certified under ASTM-E283 for Airtight Construction  
**Performance Certifications:** IC Rated / Air Tight  
**Safety Certifications:** UL Listed

## ENVIRONMENTAL SPECIFICATIONS

**UL Location Rating:** Damp Location



## PHYSICAL SPECIFICATIONS

**Housing Material:** Galvanized Steel  
**Maximum Overall Length:** 8.5in.

**Weight:** 1.22lbs



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

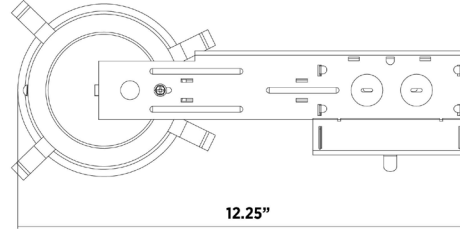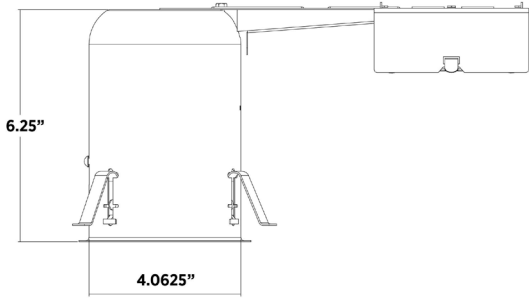

## WARRANTY INFORMATION

Warranty: 1 Year



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

**SAMPLE PART #: IC104RAT**

SERIES	SIZE	TYPE
IC	[104] : 4"	[RAT] : Remodel Air-Tight

**SHIPPING SPECIFICATIONS**

**Package**

Height: 7.5in.  
Length: 18in.  
QTY: 6

Weight: 8.45lbs  
Width: 16in.

**Master Case**

Height: 7.5in.  
Length: 18in.  
QTY: 6

QTY UOM: EA  
Weight: 8.45lbs  
Width: 16in.

**Pallet**

QTY: 180  
QTY UOM: EA