



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

CTL9054MPF35CD-P

SERIES SPECIFICATIONS

The CTL905 Series LED Mono-Point delivers high-quality accent lighting for retail, hospitality, gallery, commercial, and residential spaces. With up to 3,441 lumens and 90+ CRI, it enhances merchandise, artwork, and architectural features with accurate color rendering. Spot, Medium Flood, Flood, and Wide Flood beam distributions provide precise beam control, while multiple color temperatures support a range of design requirements. Offered in black and white finishes.



LUMINAIRE SPECIFICATIONS

Lumen Output: 3441lm
Luminaire Beam Angle: 33°

Luminaire Type: Mono- Point Head

LIGHT SOURCE SPECIFICATIONS

CRI: 90
Nominal CCT: 3500K

Source Type: LED

ELECTRICAL SPECIFICATIONS

Input Frequency: 50Hz / 60Hz
Rated Input Voltage: 120VAC

Wattage: 34W

CERTIFICATIONS

Performance Certifications: Title 24 / DLC
Safety Certifications: cETLus Listed

ENVIRONMENTAL SPECIFICATIONS

UL Location Rating: Dry Location


PHYSICAL SPECIFICATIONS

Finish Color: White
Height: 5in.
Housing Material: Aluminum
Length: 6-13/16in.

Lens Type: Clear Optics
Mounting: Surface or Ceiling
Width: 3-15/16in.



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

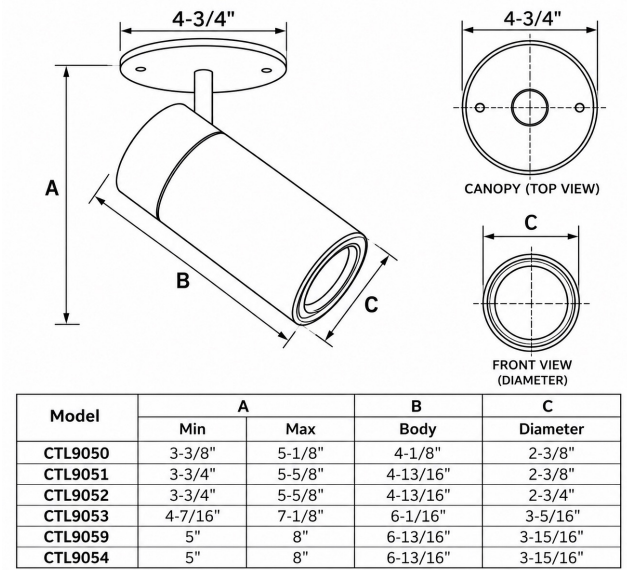

WARRANTY INFORMATION

Warranty: 5 Years



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

TRACK HEADS - Mono-Point
EXAMPLE: CTL9054MPF35CD-P

SERIES	LUMINAIRE	MOUNTING	BEAM	COLOR TEMPERATURE	DIMMING	FINISH
CTL	[9050]: 7W [9051]: 9W [9052]: 14W [9053]: 20W [9059]: 29W [9054]: 34W	[MP]: Mono-Point	[S ¹]: Spot [M ²]: Medium [F]: Flood [WF]: Wide Flood	[27C]: 2700K [3C]: 3000K [35C]: 3500K [4C]: 4000K	[D ³]: Dimming	[-B]: Black [-P]: White [-S]: Silver

- 1. Spot Beam available only for CTL9050 Series
- 2. Medium Beam not available for CTL9050 Series
- 3. Incandescent (Forward Phase) and ELV (Reverse Phase) Compatible

SHIPPING SPECIFICATIONS