PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

CTL9053WF27CD-P

SERIES SPECIFICATIONS

The CTL905 Series LED Track Light delivers high-quality accent lighting for retail, hospitality, gallery, commercial, and residential spaces. With up to 3,405 lumens and 90+ CRI, it enhances merchandise, artwork, and architectural features with accurate color rendering. Spot, Medium Flood, Flood, and Wide Flood beam distributions provide precise beam control, while multiple color temperatures support a range of design requirements. Offered in black and white finishes.

LUMINAIRE SPECIFICATIONS

Lumen Output: 2215lm
Luminaire Beam Angle: 57°
Luminaire Type: Track Light Head

LIGHT SOURCE SPECIFICATIONS

CRI: 90
Nominal CCT: 2700K
Source Type: LED

ELECTRICAL SPECIFICATIONS

Input Frequency: 50Hz / 60Hz
Rated Input Voltage: 120VAC
Wattage: 22W

CERTIFICATIONS

Performance Certifications: Title 24 / DLC
Safety Certifications: cETLus Listed

ENVIRONMENTAL SPECIFICATIONS

UL Location Rating: Dry Location

PHYSICAL SPECIFICATIONS

Finish Color: White
Height: 8-7/8in.
Housing Material: Aluminum
Length: 6-13/16in.
Lens Type: Clear Optics
Mounting: Track
Width: 3-15/16in.

PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

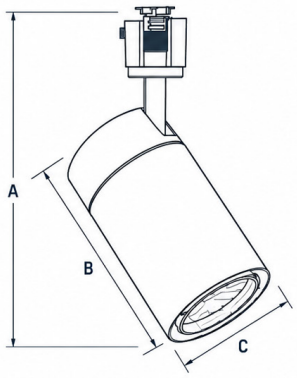

ISOMETRIC VIEW



FRONT VIEW



SIDE VIEW


TOP VIEW
(TRACK ADAPTER)

PART NUMBER	A – OVERALL HEIGHT		B BODY LENGTH	C DIAMETER
	AT 0° TILT	AT 90° TILT		
CTL9050	6"	4-1/4"	4-1/8"	2-3/8"
CTL9051	6-3/4"	4-5/8"	4-13/16"	2-3/8"
CTL9052	6-3/4"	4-5/8"	4-13/16"	2-3/4"
CTL9053	8"	5-5/16"	6-1/16"	3-5/16"
CTL9059	8-7/8"	5-7/8"	6-13/16"	3-15/16"
CTL9054	8-7/8"	5-7/8"	6-13/16"	3-15/16"

NOTES:
1. Dimensions are nominal and subject to change without notice.
2. Measurements are for reference only. Refer to actual product for exact dimensions.
3. Compatible with standard track systems (adapter shown).
4. Consult installation instructions for proper aiming and adjustment.

WARRANTY INFORMATION

Warranty: 5 Years

PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

TRACK HEADS
EXAMPLE: CTL9052F3CD-B

SERIES	LUMINAIRE	BEAM	COLOR TEMPERATURE	DIMMING	FINISH
CTL	**[9050]:** 8W **[9051]:** 9W **[9052]:** 15W **[9053]:** 22W **[9059]:** 29W **[9054]:** 35W	**[S[1]]:** Spot **[M[2]]:** Medium **[F]:** Flood **[WF]:** Wide Flood	**[27C]:** 2700K **[3C]:** 3000K **[35C]:** 3500K **[4C]:** 4000K	**[D[3]]:** Dimming	**[-B]:** Black **[-P]:** White **[-S]:** Silver

1. Spot Beam available only for CTL9050 Series
2. Medium Beam not available for CTL9050 Series
3. Incandescent (Forward Phase) and ELV (Reverse Phase) Compatible

TRACK ACCESSORIES
EXAMPLE: LT-2-B

SERIES	SIZE	FINISH
LT	**[-2]:** 2Ft Track **[-4]:** 4Ft Track **[-6]:** 6Ft Track **[-8]:** 8Ft Track	**[-B]:** Black **[-P]:** White **[-S]:** Silver
LA	**[-10]:** Top Access End Feed **[-2]:** Mini Connector **[-12]:** 3-Way Joiner	

SHIPPING SPECIFICATIONS