PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

UFO150-EM-BK

SERIES SPECIFICATIONS

The emergency driver for the UFO-150WS-3CS-SO high bay provides reliable backup power, ensuring the fixture delivers essential illumination during unexpected outages. It automatically switches to emergency mode when normal power is lost, supplying a dedicated output for a minimum of 90 minutes.



LUMINAIRE SPECIFICATIONS

Efficacy: 170lm/W

LAMP SPECIFICATIONS

Inital Lumen Output: 5200lm

ELECTRICAL SPECIFICATIONS

Current Draw 120VAC: 1.29A
Current Draw 347VAC: 0.46A
Dimming: 0-10V
Dimming Current: 0.1mA
Driver Certifications: CUL
Driver MTBF: 19800hr
Inrush Current: 400A^{2}s
Max On Delay: 1Seconds
Over Temperature Protection: Yes
Power Factor 120VAC: 0.9924
Power Factor 277VAC: 0.9827
Power Factor 347VAC: 0.9359
Short Circuit Protection: Yes
Surge Suppression: 6Volts
THD 120VAC: 5.5%
THD 347VAC: 7.9%

EMERGENCY SPECIFICATIONS

Battery Recharge Time: 24hr
Emergency Certifications: UL924, CSA 22.2, No. 141, CEC, CUL
Emergency Runtime: 90Minutes
Input Voltage: AC 100-347VAC
Max Power Input: 15W
Output Power: 30W


CERTIFICATIONS

Safety Certifications: UL Listed

PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

ENVIRONMENTAL SPECIFICATIONS

Max Operating Case Temperature: 85°C
Temperature Rating: 5-50°C

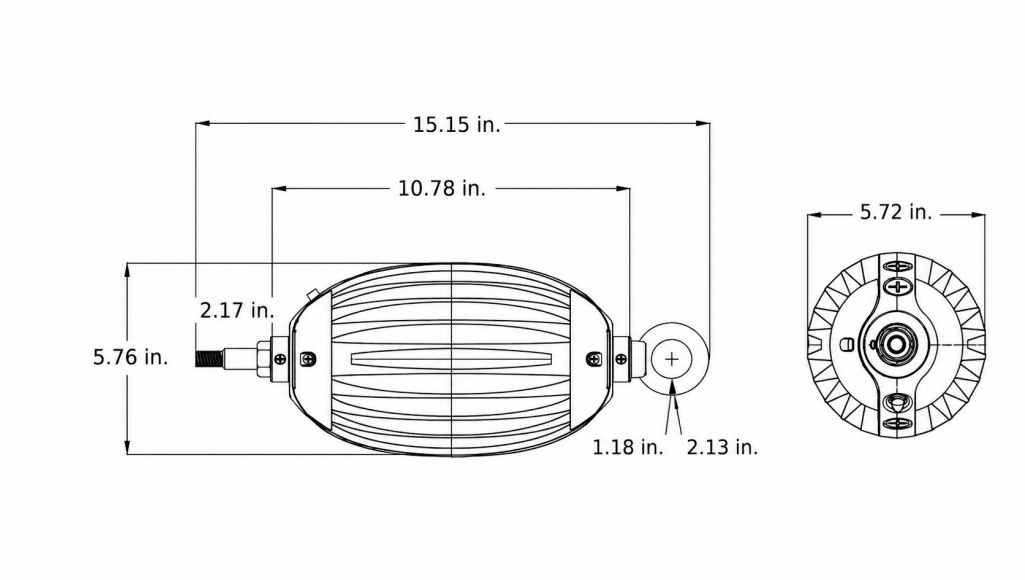

WARRANTY INFORMATION

Warranty: 5 Years

SHIPPING SPECIFICATIONS

Case

Height: 5.3in.
Length: 15.16in.
QTY: 1
Volume CUFT: 0.0112
Weight: 7.26lbs
Width: 8.46in.

Master Case

Height: 7.87in.
Length: 23.62in.
QTY: 4
Volume CUFT: 0.00432
Weight: 26.04lbs
Width: 14.17in.