PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

EMB-LED-25W

SERIES SPECIFICATIONS

The EMB-LED-25W self-diagnostic emergency backup driver provides 90-minutes of emergency operation during power outages. A rechargeable lithium battery supports 0-10V dimming LED fixtures from 25W-200W and non-dimming fixtures up to 25W. LED test switch and mounting plate included.

ELECTRICAL SPECIFICATIONS

Ballast Type: LED Driver
Dimming: 0-10V
Input Frequency: 50Hz / 60Hz
Rated Input Voltage Range: 120-347VAC
Short Circuit Protection: Yes
Wattage: 25W

EMERGENCY SPECIFICATIONS

Battery Recharge Time: 24hr
Emergency Certifications: UL924
Emergency Runtime: 90Minutes
Input Voltage: 120-347VAC
Output Power: 25W

CERTIFICATIONS

Performance Certifications: Title 20
Safety Certifications: UL Listed

ENVIRONMENTAL SPECIFICATIONS

Temperature Rating Range: 0-50°C
UL Location Rating: Damp Location

PHYSICAL SPECIFICATIONS

Finish Color: Beige
Finish Type: Powder Coated
Housing Material: Aluminum
Mounting: Fixture
Thread: 1/2 Inch
Weight: 3.2lbs

PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

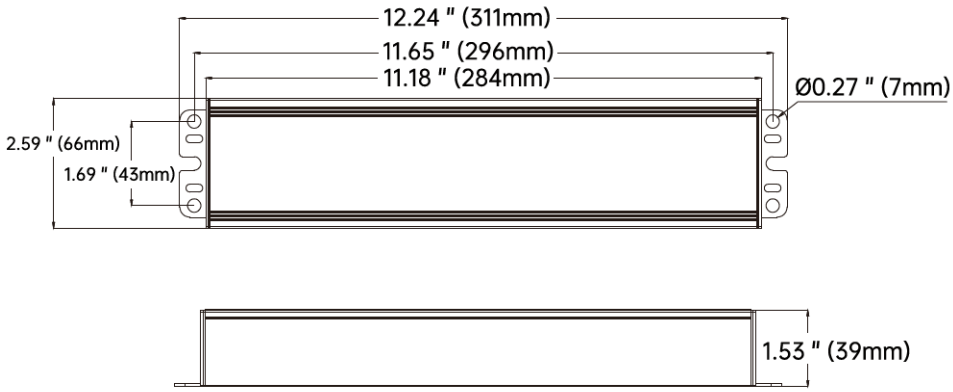

WARRANTY INFORMATION

Warranty: 5 Years

NOTES

Self-diagnostic emergency backup driver

90-minute runtime with rechargeable lithium battery

0-10V dimming fixtures (25-200W); non-dimming up to 25W

Includes LED test switch and mounting plate

Includes 18” flexible conduit with 1/2” 90° connector

Sensor and dimmer cannot be used at the same time

PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

EXAMPLE: EMB-LED-25W

SERIES	TYPE	OUTPUT POWER
EMB	[-LED]: LED emergency backup driver	[-25W]: 25 Watts [-40W]: 40 Watts

SHIPPING SPECIFICATIONS

Case

Height: 2.25in.
Length: 19.75in.
QTY: 1
Weight: 3.2lbs
Width: 7.5in.