



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

EMB-LED-40W

SERIES SPECIFICATIONS

The EMB-LED-40W self-diagnostic emergency backup driver provides 90-minutes of emergency operation during power outages. A rechargeable lithium battery supports 0-10V dimming LED fixtures from 40W-350W and non-dimming fixtures up to 40W. LED test switch and mounting plate included.



ELECTRICAL SPECIFICATIONS

Ballast Type: LED Driver
Dimming: 0-10V
Input Frequency: 50Hz / 60Hz
Rated Input Voltage Range: 120-347VAC

Short Circuit Protection: Yes
Wattage: 40W

EMERGENCY SPECIFICATIONS

Battery Recharge Time: 24hr
Emergency Certifications: UL924
Emergency Runtime: 90Minutes

Input Voltage: 120-347VAC
Output Power: 40W

CERTIFICATIONS

Performance Certifications: Title 20
Safety Certifications: UL Listed

ENVIRONMENTAL SPECIFICATIONS

Temperature Rating Range: 0-50°C
UL Location Rating: Damp Location


PHYSICAL SPECIFICATIONS

Finish Color: Beige
Finish Type: Powder Coated
Housing Material: Aluminum
Mounting: Fixture

Thread: 1/2 Inch
Weight: 3.2lbs



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

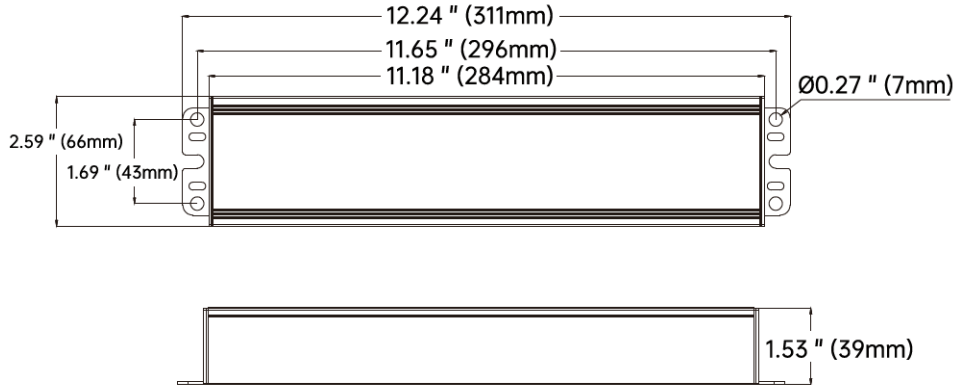

WARRANTY INFORMATION

Warranty: 5 Years

NOTES

- Self-diagnostic emergency backup driver
- 90-minute runtime with rechargeable lithium battery
- 0-10V dimming fixtures (40-350W); non-dimming up to 40W
- Includes LED test switch and mounting plate
- Includes 18" flexible conduit with 1/2" 90° connector
- Sensor and dimmer cannot be used at the same time



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

EXAMPLE: EMB-LED-25W

SERIES	TYPE	OUTPUT POWER
EMB	[-LED]: LED emergency backup driver	[-25W]: 25 Watts [-40W]: 40 Watts

SHIPPING SPECIFICATIONS

Case

Height: 2.25in.

Length: 19.75in.

QTY: 1

Weight: 3.2lbs

Width: 7.5in.