



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

FLD-60WS-3CS-BZ

SERIES SPECIFICATIONS


The FLD series offers quick, adjustable beam angles, allowing you to switch between 90°, 75°, and 55° with ease. With our wattage/color select technology, the built-in photocell, and BOTH mounting options included in the box, this fixture is redefining multi-purpose floodlighting.



LUMINAIRE SPECIFICATIONS

Beam Angle Range: 55-90°
Efficacy: 145lm/W
Lumen Output: 6500/7300/8000/8700lm

Luminaire Type: Flood Light

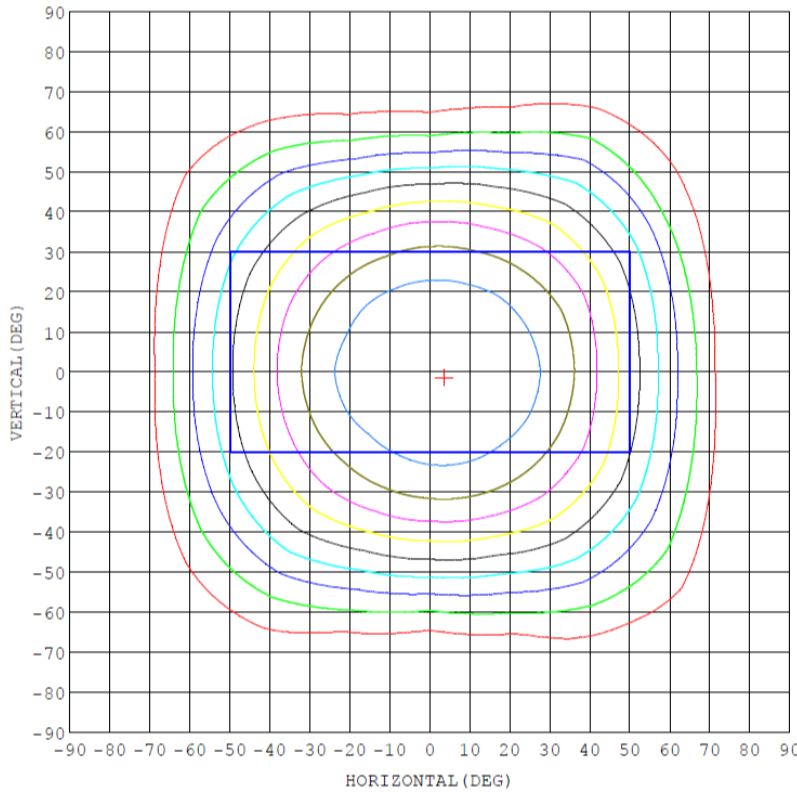

MAX = 3789.6
 MIN = 1420.4
 AVG = 3049.8
 AVG/MAX = 0.80
 MIN/MAX = 0.37

Imax: 3790 (H3.5, V-1.5)
 (At: C=22.5, Gamma=4.0)
 UNIT: cd

90° beam angle



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

LIGHT SOURCE SPECIFICATIONS

CRI: 80
Nominal CCT: 3000K/4000K/5000K

Source Type: LED

ELECTRICAL SPECIFICATIONS

Ballast Type: LED Driver
Dimming: 0-10V
Input Frequency: 50Hz / 60Hz

Rated Input Voltage Range: 120-277VAC
Wattage: 60/55/50/45W

SENSOR SPECIFICATIONS

Sensor Type: Photocell

CERTIFICATIONS

Safety Certifications: UL Listed

ENVIRONMENTAL SPECIFICATIONS

IP Rating: IP65
Temperature Rating Range: -40-40°C

UL Location Rating: Wet Location



PHYSICAL SPECIFICATIONS

Finish Color: Bronze
Finish Type: Powder Coat
Housing Material: Aluminum
Lens Material: Tempered Glass

Mounting: Knuckle/trunnion
Wiring Type: 3-Wire (L-N-G) 2-wire(010Vdc)



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

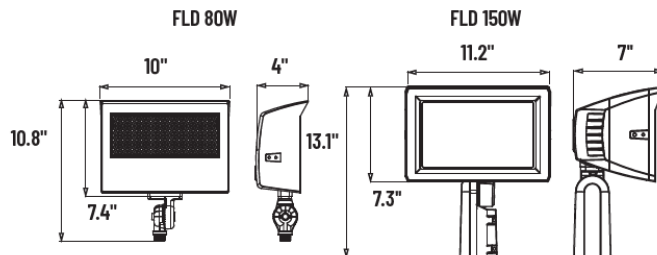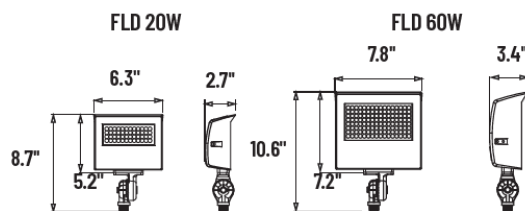

WARRANTY INFORMATION

Warranty: 5 Years

NOTES

- 1/2" knuckle and trunnion mount included
- Adjustable beam angle 55/75/90°



PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

EXAMPLE: FLD-20WS-3CS-BZ

SERIES	WATTAGE	COLOR TEMP.	FINISH
FLD	-20WS: Selectable 20/15/10/5W -60WS: Selectable 60/55/50/45W -80WS: Selectable 80/70/60/50W -150WS: Selectable 150/125/100/80W	-3CS: Selectable 3000/4000/5000K	-BZ: Bronze

SHIPPING SPECIFICATIONS