

## MWPWSCS

### 1. Introduction

This LED Wall-Packs light uses the latest in solid state lighting technology for long life, low maintenance, and high efficiency.

An internal power-factor-corrected switch-mode supply allows it to be used from any nominal 100-277V, 50/60Hz AC supply without any variation in light output.

Suitable for use in the following locations:

- Ambient Temp: -20~+40°C
- Wet Locations

### WARNING

**READ PRIOR TO INSTALLATION. INSTALLATION SHOULD BE CARRIED OUT BY A CERTIFIED ELECTRICIAN.**

#### Warning:

To avoid the risk of fire, or electric shock, this product should be installed, inspected, and maintained by a qualified electrician only, in accordance with all applicable electrical codes.

#### Warning:

To avoid electric shock:

- Be certain electrical power is OFF before and during installation and maintenance.
- Luminaire must be connected to a wiring system with an equipment-grounding

#### Warning:


To avoid explosion:

- Make sure the supply voltage is the same as the rated luminaire voltage.
- Do not operate in ambient temperatures above those indicated on the luminaire nameplate.
- Keep lens tightly closed when in operation.


### INSTALLATION STEPS

**For supply connections use wire rated for at least 90°C**


Step 1: Turn on the screws on both sides of the lamp shade, then take off the lamp shade.




Step 2: Loosening the four screws as shown in the picture, take off the driver box.



Step 3: Using tools to open the installation position of Junctions Box, then fix the lamp on Junctions Box.




Step 4: Install shade.



## INSTALLATION INSTRUCTIONS

Diagrams and Methods of wattage & CCT Selectable Function:

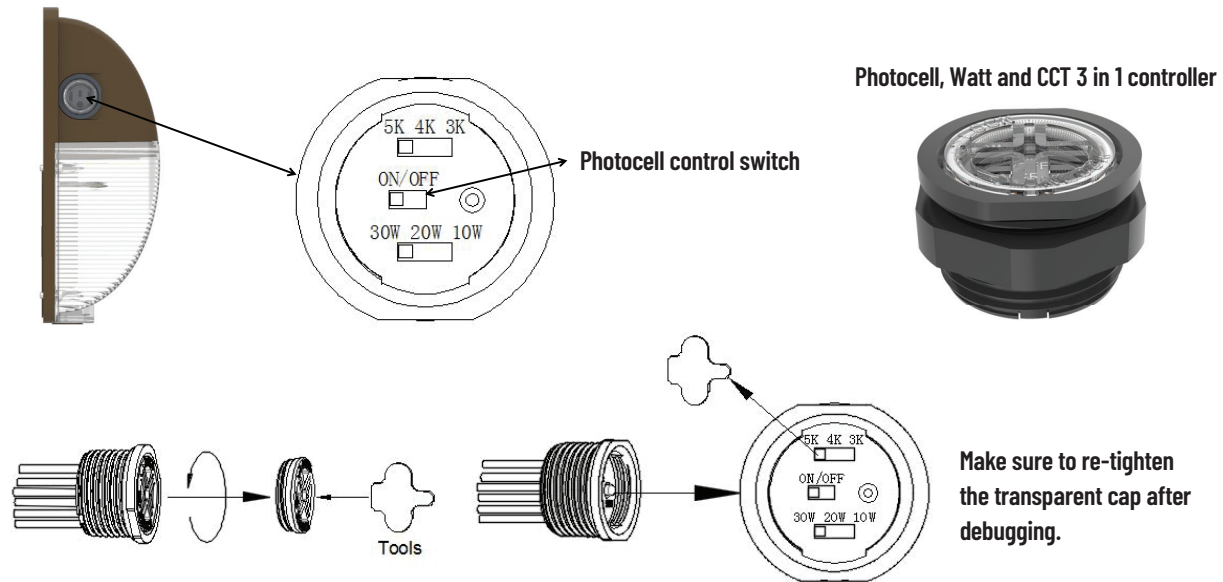

According to the watt and CCT selectable label shown in the diagram, please toggle the DIP to select the corresponding watt and CCT.

After installation, please:

- Check whether the lighting fixture is firmly fixed.
- Check whether wires are connected correctly.
- At last, turn on the power, and check if the lighting fixture works well. If not, please turn off the power and contact with local dealer.