



# TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986  
tel: (772) 878-4944 or on the web at [www.tamliteusa.com](http://www.tamliteusa.com)

## SPECIFICATION & FEATURES

Catalog #:	01/30/2018
Project:	Type:
Prepared By:	

### HOUSING

Die cast aluminum housing, removable hinged door with gasket and captive corrosion resistant stainless steel screws, 1/2" coin plugs with O-rings for conduit entry or photocell installation on both sides and top, durable bronze powdercoat finish.

### LENS

Molded wedge shaped prismatic surface borosilicate glass lens

### MOUNTING

Has cast-in template for mounting directly over a 4" recessed box or use 1/2" surface mount conduit connection.

### ELECTRICAL DETAILS

WATTS : 78.02  
INPUT VOLTAGE : 120-277V  
FREQUENCY : 50/60 Hz  
POWER FACTOR : .9481

### LIGHT OUTPUT PERFORMANCE

DELIVERED LUMENS : 9953  
LUMENS PER WATT : 127.57  
COLOR TEMP : 5000K  
CRI : 72  
IES DISTRIBUTION : Type IV  
LIFE : 50,000 HRS.

### LISTINGS/RATINGS/COMPLIANCE

UL Listed  
DLC Listed\*  
Suitable for wet locations.

### WARRANTY

Guaranteed for five years against mechanical defects in manufacturing.

### NOTES

Product performance may vary depending on model and end user environment.

\*Not all product variations meet Design Light Consortium Qualifications. Please verify that the product is listed on the DLC products list at [www.designlightconsortium.org/QPL](http://www.designlightconsortium.org/QPL).


\*\*\* SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE\*\*\*

# W2LED Series

## 80W LED Wall Pack



### SPECIFICATIONS / DIMENSIONS

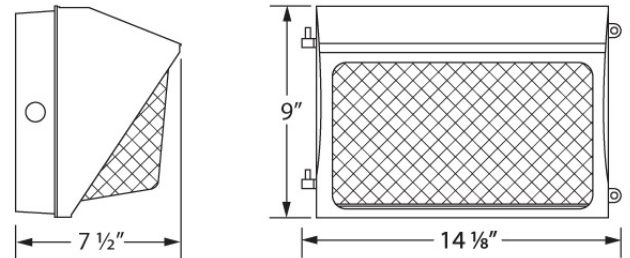

### ORDERING INFORMATION

Sample Part Code: W2LED805K

<b>W2LED</b>	<b>80</b>	<b>5K</b>
SERIES	WATTAGE	COLOR TEMP

W2LED

[80] : 80 watts

[5K] : 5000K