



TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986
tel: (772) 878-4944 or on the web at www.tamliteusa.com

SPECIFICATION & FEATURES

Catalog #:	08/22/2016
Project:	Type:
Prepared By:	

DESCRIPTION

The LSR-1RC is a remote capable thermoplastic LED emergency light that utilizes fully adjustable high lumen LED heads, long life and environmentally friendly Ni-Cad battery in an easy to install fixture design.

HOUSING

Injection molded, engineering-grade, UV-stabilized, UL 94V-0 flame rating, high-impact and corrosion-resistant thermoplastic housing
High-performance chrome-plated metalized reflector with polycarbonate lens
Test switch and AC power indicator light

ELECTRICAL DETAILS

LVD (low voltage disconnect) prevents battery from deep discharge.
Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
Maintenance free, rechargeable, environmentally friendly Ni-Cad battery

SOURCE/WATTAGE

Dual-voltage input 120 or 277V has charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing

120V: .010 Amps, .85 Max Watts
277V: .010 Amps, .80 Max Watts

LAMP

Two lamp heads are long lasting, efficient, ultra-bright white LEDs
The adjustable LED lamp heads provide optimal center-to-center spacing
Each head has 8 LED diodes which continue to illuminate when one fails

MOUNTING

Surface mount via "easy connect" backplate; which fits most standard junction boxes
Snaps into place making internal electrical connections
Flexible conduit mounts using knockouts on backplate
Easy rounded push-in tabs for quicker installation

LISTINGS/RATINGS/COMPLIANCE

Fixtures are UL listed and suitable for damp locations.

Meets UL924, NEC standards

WARRANTY

Guaranteed for five years against mechanical defects in manufacturing.

Batteries are pro-rated warranted for two years.

NOTES

Product performance may vary depending on model and end user environment.

*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***


LSR-1RC Series

Remote Capable LED Mini Emergency Light



SPECIFICATIONS / DIMENSIONS

	Body	Body w/heads
LENGTH:	8 5/8"	10"
WIDTH:	4 3/4"	4 3/4"
DEPTH:	3"	3"

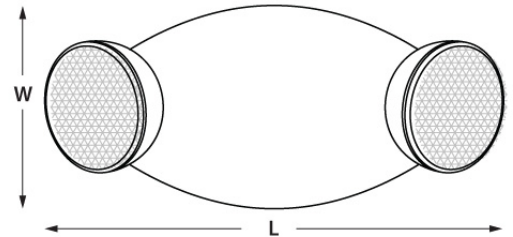

ORDERING INFORMATION

Sample Part Code: LSR-1RC

LSR-1RC		RC
SERIES	HOUSING COLOR	OPTION

LSR-1RC

[BLANK]: White
[B]: Black

[RC]: Remote Capable