


MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

SERIES SPECIFICATIONS

The EXPC series thermoplastic exit sign and emergency lighting combination unit that offers long lamp life, energy efficiency and uniform illumination with square glare-free incandescent heads.



LINE DRAWING

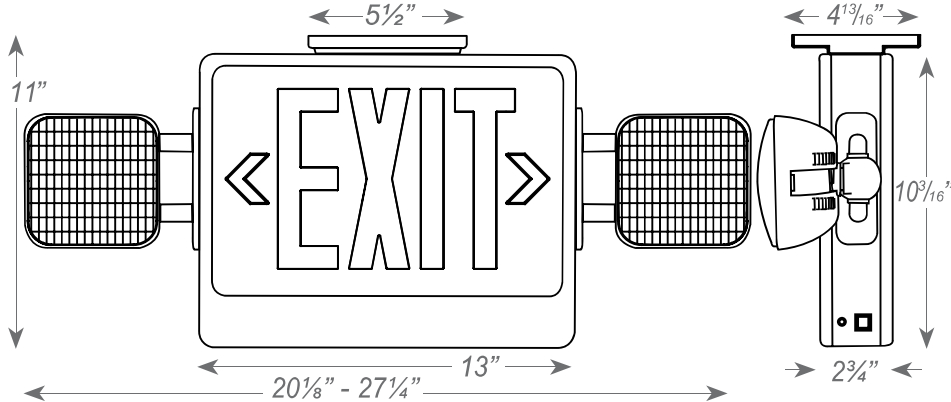

CONSTRUCTION

Housing
Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic

Reflector
Smooth thermoplastic reflector

Chevrons
Snap-out chevron directional indicators

Lamp heads
2 fully adjustable 5.4W, glare free lamp heads

BATTERY SPECIFICATIONS

Battery Type
6V Sealed lead acid

Emergency Illumination
Minimum 90 Minutes

Battery Recharge Time
24 Hours.

Low Voltage Disconnect
Prevents battery from deep discharge

LED Indicator
Charge rate/power "ON" and push to test switch

Battery Charger
Two rate, fully automatic solid-state

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



MODEL :	TYPE
PROJECT :	
PREPARED BY :	DATE :

ELECTRICAL SPECIFICATIONS CONT.

Frequency 50/60Hz	Operating Voltage 120/277	Input Watts 10W @ 120V 10W @ 277V
Input Amps 0.10A @ 120V 0.05A @ 277V	Operating Temp 20°C ~ 40°C	

MOUNTING SPECIFICATIONS

Universal K/O pattern on back plate for wall mount.

Easy snap mounting canopy included for top or end mount.

Suitable for wall or ceiling mount

Options

SD:
Self-diagnostic test feature continually diagnoses unit's performance and tests system to ensure reliable operation and to meet electrical and life safety codes

HTR:
Optional internal heater for cold temperature applications.

USA
Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

CERTIFICATIONS/WARRANTY

Listing
UL Listed

Safety Certifications
UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Location Rating
Suitable for damp locations

Assembled in USA
This product has been assembled in the USA*

Warranty
Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing. Batteries are pro-rated for two years.

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION

11675 SW TOM MACKIE BLVD. | PORT ST. LUCIE, FL 34987 | PH: 772.878.4944 | TAMLITEUSA.COM



MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ORDERING INFORMATION

Sample Part Number: EXPC3RWEM

EXPC	3				
SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	OPERATION	OPTION
EXPC	[3] : Universale Single and Double Face	[R] : Red	[B] : Black	[BLANK] : A/C Only	[BLANK] : No Option
		[G] : Green	[W] : White	[EM] : Battery Backup	[SD] : Self-Diagnostic
					[HTR] : Heater
					[USA] : Assembled in the USA*

NOTES

*Product only Assembled in the USA when using USA option.