

CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

SERIES SPECIFICATIONS

CLY6SQ-5CCTA/WH Series

6" LED Square Panel Light

The CLY series recessed LED panel light provides a highly versatile, high quality option for retrofit and new work applications.



FEATURES AND SPECIFICATIONS

Construction

Remote mount steel driver box. Aluminum housing on LED array with finned heat sinks. These combined- provide excellent heat dissipation to entire LED system.

Electrical

Plenum rated driver, 120-277v.

Optics

PMMA optic with PS diffuser.

Lighting Performance

High lumen, ideal for commercial applications. Five CCT options provide excellent versatility.

Dimming

Triac dimming, 10-100%

Installation

IC rated driver ideal for recessed applications. LED array recessed in hard lid ceiling with steel compression springs.

Listings

ETL listed to US and Canadian safety standards. Wet location listed. IC Rated. Energy Star Listed.

Ambient Operating Temperature

-40°C - 40°C



Warranty

5-year limited warranty.

NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

LINE DRAWING

Cut size for the hole.
6 1/2" x 6 1/2"

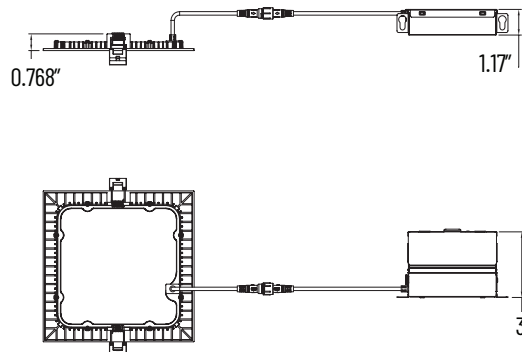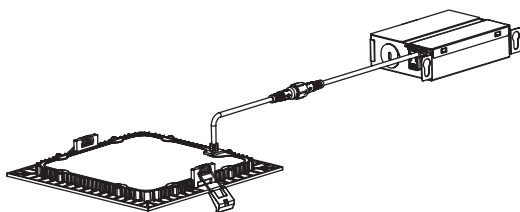



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

ORDERING INFORMATION

EXAMPLE: CLY6SQ-5CCTA/WH

SERIES	SIZE	SHAPE	CCT SELECTABLE	COLOR
CLY	[6] : 6"	[SQ] : Square	[-5CCTA] : 2700K/3000K/3500K/4000K/5000K	[/WH] : WHITE

LIGHTING & ELECTRICAL SPECIFICATIONS

SERIES	INPUT POWER	LPW	LUMENS @ 2700K	CRI	L70 (HOURS)
CLY6SQ-5CCTA/WH	15W	80	1,200	90	50,000

Input	
Input Voltage (VAC)	120-277v
Frequency Range (Hz)	50-60 Hz
Efficiency @ Full Load	>87
Power Factor @ Full Load	> 0.9

ACCESSORIES

*Accessories sold separately

EXTENSION CABLES

0542-2791

20FT extension cord for CLY CCTA





CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

COMPATIBLE DIMMER LIST

NO	BRAND	DIMMER ITEM NO
1	LUTRON	MACL-153MR-WH
2		TGCL-153P
3		SCL-153PR-WH
4		AY-600P
5		SCL-153P-LA
6		DVCL-153P
7		MACL-153P
8		CTCL-153P
9		TG-600PH-WH
10		LGCL-153P
11		S-603PG-WH
12		CTELV-303P-WH
13		DV-600P
14	LEVITON	6633-I
15		IPI06-1LZ
16		6161-A
17		6633-POG
18		6631
19		6633-PLW
20		6633-P
21		6674
22		IPI10-1LZ
23		IPL06-1OZ
24		6151
25		6681

APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION