PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

SLR-1RC

SERIES SPECIFICATIONS

The SLR Series Emergency Light provides dependable emergency lighting in a compact, easy-to-install design. Featuring adjustable square LED heads, a long-life Ni-Cad battery and durable thermoplastic construction, it is ideal for offices, schools, retail spaces, and other commercial applications.



LUMINAIRE SPECIFICATIONS

Lumen Output: 161lm
Luminaire Type: Emergency Light

ELECTRICAL SPECIFICATIONS

Input Frequency: 50Hz / 60Hz
Rated Input Voltage: 120VAC / 277VAC
Wattage: 0.9W

EMERGENCY SPECIFICATIONS

Battery Recharge Time: 24hr
Emergency Certifications: UL294
Emergency Runtime: 90Minutes
Output Power: 2.30W

CERTIFICATIONS

Performance Certifications: Title 20
Safety Certifications: cULus Listed


ENVIRONMENTAL SPECIFICATIONS

Temperature Rating Range: 10-40°C
UL Location Rating: Damp Location

PHYSICAL SPECIFICATIONS

Finish Color: White
Finish Type: Plastic
Height: 4.375in.
Housing Material: Thermoplastic
Length: 12.375in.
Lens Material: Polycarbonate
Lens Type: Clear Optics
Mounting: Surface
Width: 3 5/8in.

PROJECT:	
LOCATION:	
MODEL#:	**TYPE:**
CLIENT:	**QTY:**
PREPARED BY:	**DATE:**

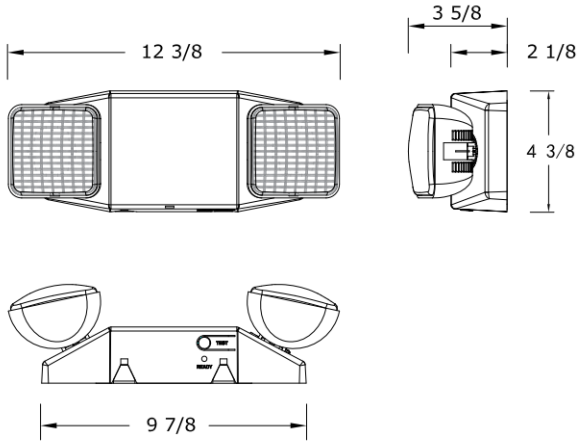

WARRANTY INFORMATION

Warranty: 5 Years

NOTES

- Universal J-box pattern knock-out
- Universal mounting plate with quick-connect feature
- Replacement battery 3.6V rechargeable Ni-Cad 1800mAh
- Remote-Capable version offers up to an additional 2.3 Watts for 90 minutes

PROJECT:	
LOCATION:	
MODEL#:	TYPE:
CLIENT:	QTY:
PREPARED BY:	DATE:

EXAMPLE: SLR-1

SERIES	TYPE	COLOR	OPTION
SLR	[-1]: Square Head	[BLANK]: White [B]: Black	[BLANK]: Emergency Backup [RC]: EM & Remote Capable [SD]: EM & Self-Diagnostic

SHIPPING SPECIFICATIONS

Case

Height: 4.25in.
Length: 12.75in.
QTY: 1
Weight: 1.75lbs
Width: 5.25in.

Master Case

Height: 13in.
Length: 17.5in.
QTY: 9